POTTER ONE DEPARTURE

D-ATIS
135.5
CLNC DEL
119.4 323.1
GND CON
121.9 338.25
ANCHORAGE TOWER
118.3 257.8
ANCHORAGE DEP CON
126.4 270.25

TOP ALTITUDE: 4000

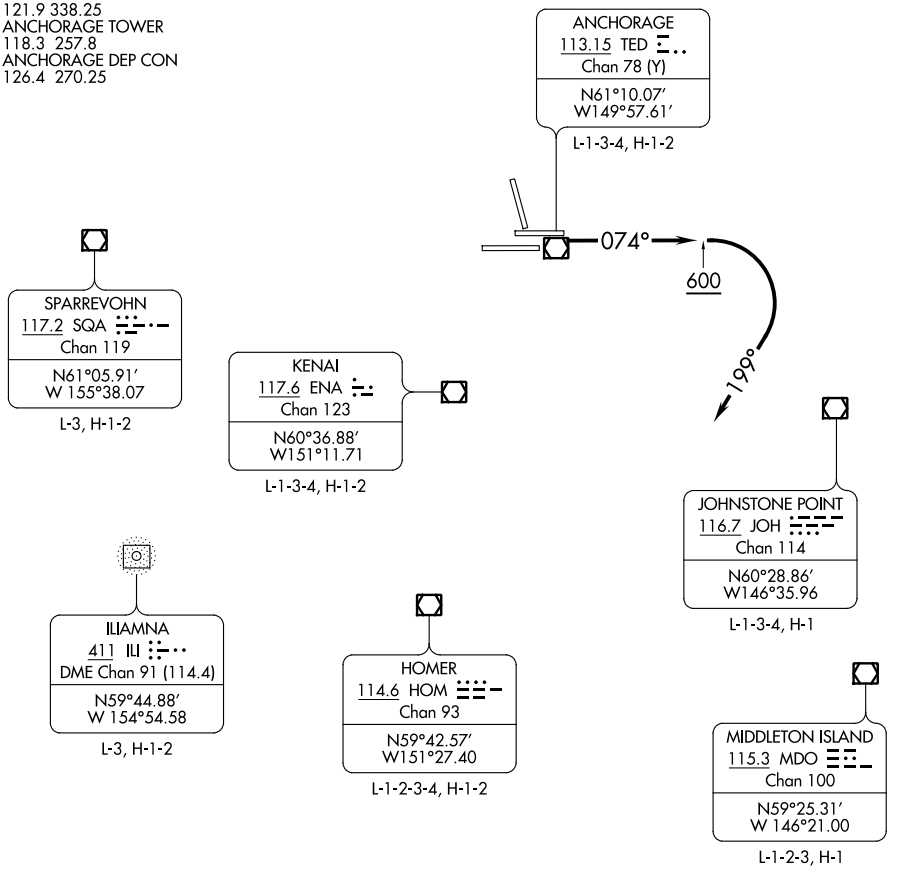

TAKEOFF MINIMUMS
Rwy 7L: 300-1⅛ or standard with minimum climb of 255 feet per NM to 400.
Rwy 7R: 300-1 or standard with minimum climb of 285 feet per NM to 400.

NOTE: RADAR required.
NOTE: Maximum procedure airspeed limited to 200K.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 7L/R: Climb heading 074° to 600, then climbing right turn on heading 199°. Thence . . .
. . . expect RADAR vectors to assigned route or depicted fix. Maintain 4000.
Expect further clearance to filed altitude within 10 minutes after departure.

AK, 05 NOV 2020 to 31 DEC 2020