


WAAS CH 61142 W01A	APP CRS 011°	Rwy Idg 3992 TDZE 89 Apt Elev 92
----------------------------------------	------------------------	-------------------------------------------------------------

RNAV (GPS) RWY 1
NOATAK (WTK)(PAWN)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, procedure NA below -22°C or above 54°C. ▲		MISSED APPROACH: Climb to 1000 then climbing right turn to 3400 direct FITSU and hold.	
AWOS-3P 135.75	ANCHORAGE CENTER 119.2 263.0	KOTZEBUE RADIO 122.4	UNICOM 122.8 (CTAF) 0

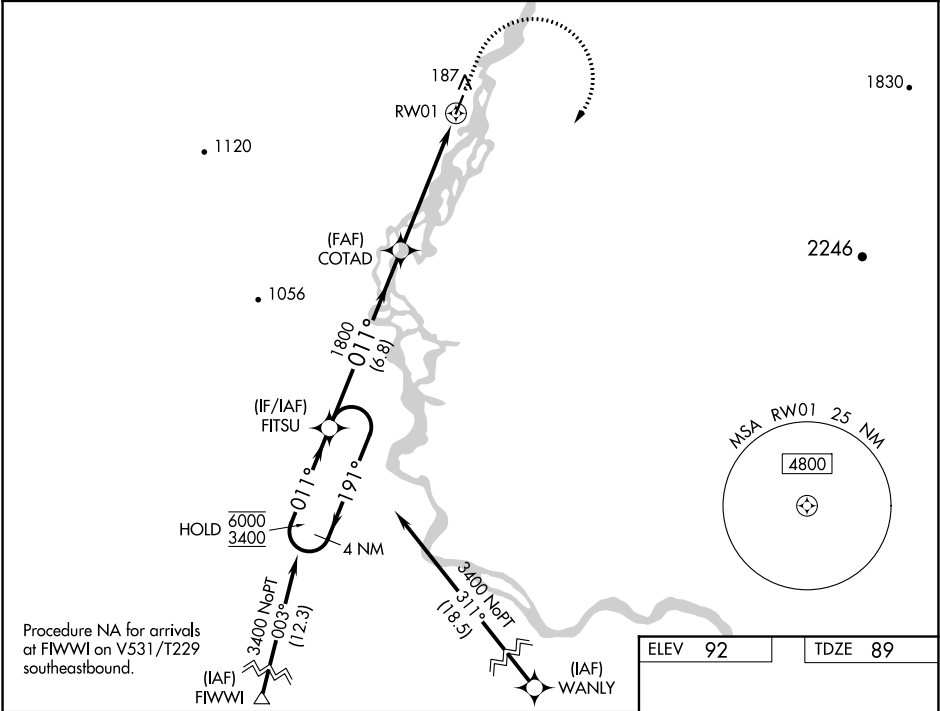

4 NM Holding Pattern		FITSU	COTAD	<div><div>1000</div><div>3400</div><div>FITSU</div></div>
6000 ← 191°	011° →	011°	1800	* 1.3 NM to RW01
3400		1800		* LNAV only
GP 3.00°				
TCH 30				
		6.8 NM	4 NM	1.3 NM
CATEGORY	A	B	C	D
LPV DA	339-1 250 (300-1)			
LNAV/ VNAV DA	339-1 250 (300-1)			
LNAV MDA	520-1 431 (500-1)		520-1¼ 431 (500-1¼)	
CIRCLING	520-1 428 (500-1)	560-1 468 (500-1)	560-1½ 468 (500-1½)	820-2¼ 728 (800-2¼)

