


WAAS CH <b>50542</b> <b>W06A</b>	APP CRS <b>055°</b>	Rwy Idg <b>4494</b> TDZE <b>45</b> Apt Elev <b>45</b>
--	------------------------	---

RNAV (GPS) RWY 6

WAINWRIGHT (AWI) (PAWI)

RNP APCH.	MISSED APPROACH: Climb to 2000 direct MEXIW and hold.
<div><div>▼</div><div>⚠ -42°C</div></div> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C.	

ASOS-3 <b>132.25</b>	ANCHORAGE CENTER <b>135.3 239.25</b>	BARROW RADIO <b>122.5</b>	CTAF <b>122.8</b>
-------------------------	---	------------------------------	----------------------

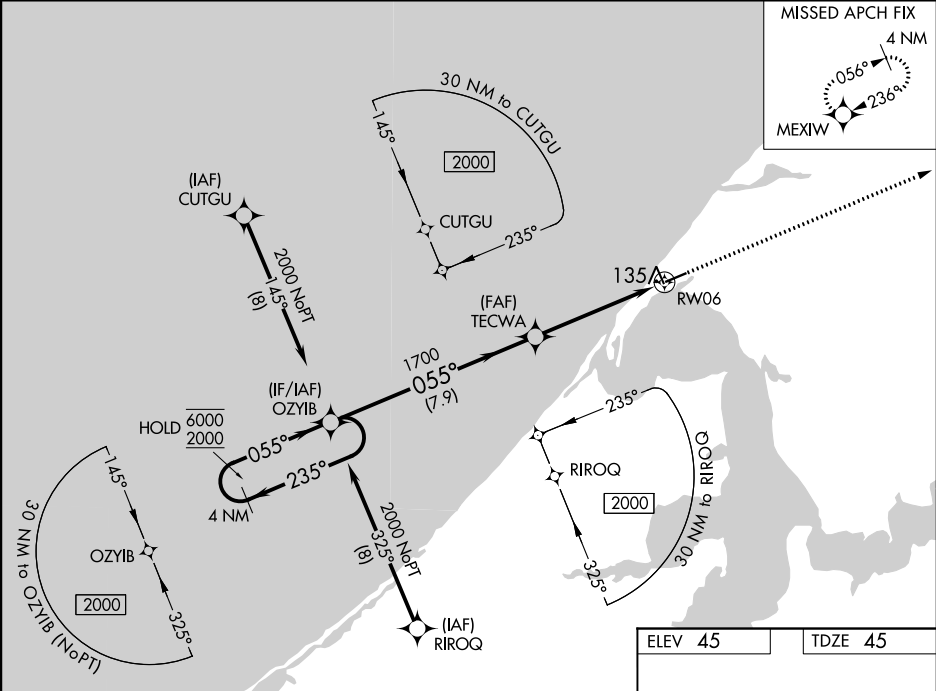

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		2000	MEXIW
				*LNAV only	
GP 3.00° TCH 45				*1 NM to RW06	
CATEGORY	A	B	C	D	
LPV DA	295-1		250 (300-1)		
LNAV/ VNAV DA	316-1		271 (300-1)		
LNAV MDA	400-1		355 (400-1)		
CIRCLING	460-1 415 (500-1)	500-1 455 (500-1)	500-1½ 455 (500-1½)	600-2 555 (600-2)	

