


TOP ALTITUDE:
ASSIGNED AT ATC

TAKEOFF MINIMUMS:

- Rwy 1: Standard.
- Rwy 19: Standard with minimum climb of 234' per NM to 1500.

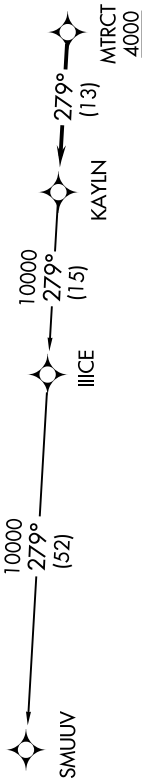

- NOTE: RNAV 1.
- NOTE: RADAR required.
- NOTE: DME/DME/IRU or GPS required.
- NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.

- ATIS 125.325 270.1
- CINC DEL 128.3 275.8
- GND CON 128.3 275.8
- SELFIDGE TOWER ★ 120.15 225.4
- SELFIDGE DEP CON 119.6 391.9



NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

- TAKEOFF RUNWAY 1: Climb on heading 007° or as assigned for RADAR vectors to cross MTRCT at or above 4000, thence....
- TAKEOFF RUNWAY 19: Climb on heading 187° or as assigned for RADAR vectors to cross MTRCT at or above 4000, thence....
-on track 279° to KAYLN, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

SMUUV TRANSITION (KAYLN2.SMUUV):