**TOP ALTITUDE: ASSIGNED BY ATC**

ATIS 125.025
CLNC DEL 118.25
GND CON 121.9
PONTIAC TOWER★ 120.5 (CTAF)
DETROIT DEP CON 132.35 284.0

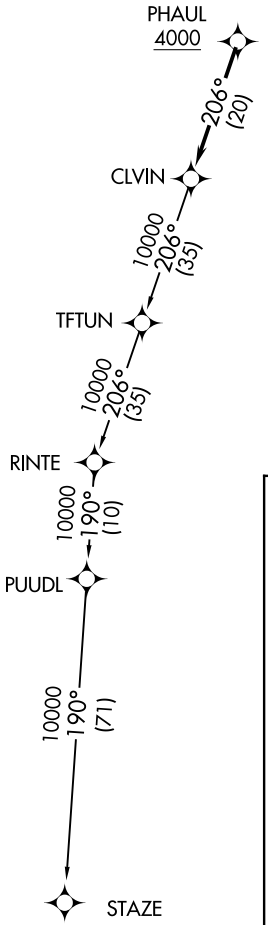


TAKEOFF MINIMUMS:
Rwys 9L/R, 27L/R: Standard.
Rwys 18, 36: NA-Environmental.

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 9L/R: Climb on heading 095° or as assigned for RADAR vectors to cross PHAUL at or above 4000, thence....
TAKEOFF RUNWAYS 27L/R: Climb on heading 275° or as assigned for RADAR vectors to cross PHAUL at or above 4000, thence....

....on track 206° to CLVIN, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

STAZE TRANSITION (CLVIN2.STAZE):



EC-1, 03 DEC 2020 to 31 DEC 2020
EC-1, 03 DEC 2020 to 31 DEC 2020