LIDDS TWO DEPARTURE (RNAV)
(LIDDS2.LIDDS) 15AUG19

OAKLAND COUNTY INTL (PTK)
PONTIAC, MICHIGAN

TOP ALTITUDE: ASSIGNED BY ATC

275° — 095°

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.

TAKEOFF MINIMUMS:
Rwys 9L/R, 27L/R: Standard.
Rwys 18, 36: NA-Environmental.

ATIS 125.025
CLNC DEL 118.25
GND CON 121.9
PONTIAC TOWER ★ 120.5 (CTAF)
DETROIT DEP CON 132.35 284.0

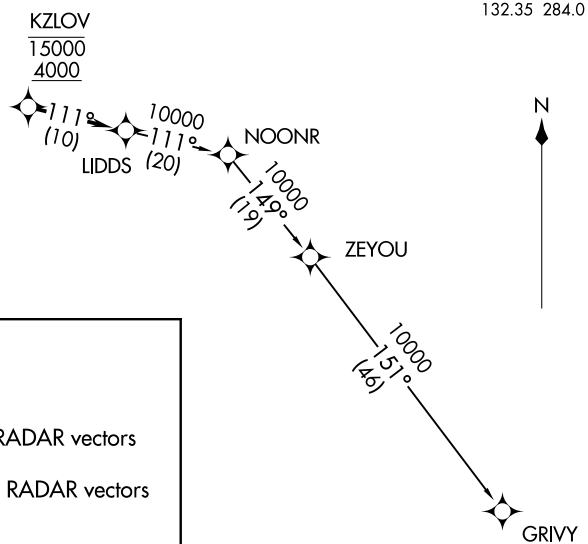

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 9L/R: Climb on heading 095° or as assigned for RADAR vectors to cross KZLOV between 4000 and 15000, thence....
TAKEOFF RUNWAYS 27L/R: Climb on heading 275° or as assigned for RADAR vectors to cross KZLOV between 4000 and 15000, thence....

....on track 111° to LIDDS, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

GRIVY TRANSITION (LIDDS2.GRIVY):

NOTE: Chart not to scale.

(LIDDS2.LIDDS) 19227
LIDDS TWO DEPARTURE (RNAV)
AL-5052 (FAA)

OAKLAND COUNTY INTL (PTK)
PONTIAC, MICHIGAN