

AWOS-3
119.475
CTAF
123.05
DETROIT D
134.3 28.

NOTE: RNAV 1.


NOTE: RADAR required.

NOTE: DME/DME/IRU or GPS required.

NOTE: Turbojet departures at/above 10000,

maintain 280K until advised by ATC.
NOTE: BROKK TRANSITION: For use by flights filed at or below
FL270, or as assigned by ATC.

**TOP ALTITUDE:
ASSIGNED BY ATC**

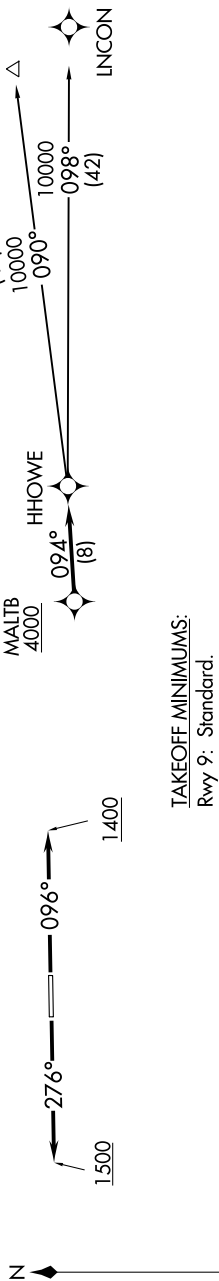

TAKEOFF MINIMUMS:

Rwy 9: Standard.

Rwy 27: Standard with minimum climb of 476' per NM to 1500.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 9: Climb on heading 096° to 1400 then as assigned for RADAR vectors to cross MALTB at or above 4000, thence....

TAKEOFF RUNWAY 27: Climb on heading 276° to 1500 then as assigned for RADAR vectors to cross MALTB at or above 4000, hence....

.....on track 094° to HHOWE, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

BROKK TRANSITION (HHOWE3.BROKK)
INCON TRANSITION (HHOWE3.INCON)

HHOWE THREE DEPARTURE (RNAV)

(HHOWE3.HHOWE) 05DEC19

TROY, MICHIGAN

OAKLAND/TROY (VLL)