

WAAS CH <b>82223</b> <b>W04A</b>	APP CRS <b>046°</b>	Rwy Idg TDZE Apt Elev	<b>3699</b> <b>623</b> <b>623</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

TOLEDO EXECUTIVE (TDZ)

RNP APCH.


▼

▲

Circling Rwy 14 NA at night. Rwy 4 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Toledo Express altimeter setting and increase all MDA 60 feet, LP Cats C/D visibility ½ mile, increase LNAV and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2300 direct VEFDO and hold.

ASOS <b>121.575</b>	TOLEDO APP CON <b>126.1 307.0</b>	CLNC DEL <b>125.6</b>	UNICOM <b>123.05 (CTAF) 0</b>
------------------------	--------------------------------------	--------------------------	----------------------------------

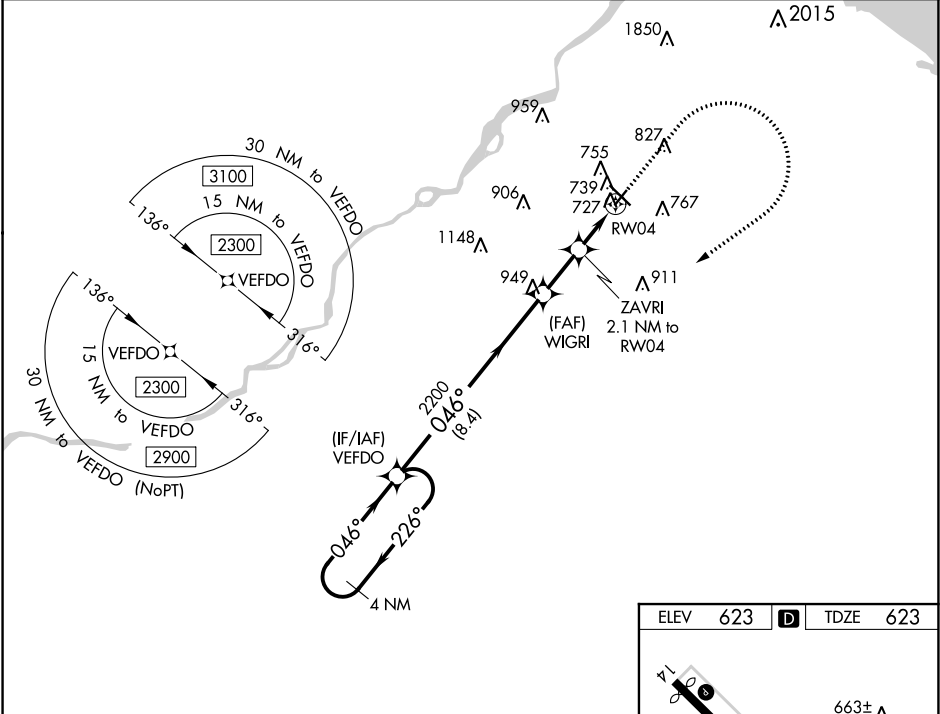

4 NM Holding Pattern VEFDO				
CATEGORY	A	B	C	D
LP MDA	980-1		357 (400-1)	
LNAV MDA	1000-1		377 (400-1)	
CIRCLING	1080-1 457 (500-1)	1100-1 477 (500-1)	1200-1½ 577 (600-1½)	1320-2¼ 697 (700-2¼)

