WAAS	APP CRS	Rwy Idg	5501
CH 53704	046°	TDZE	575
W05A		Apt Elev	583

RNAV (GPS) RWY 5

FREEMAN MUNI (SER)

Baro-VNAV NA when using Louisville Muhammad Ali Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C(130°F). When local altimeter setting not received, use Louisville Muhammad Ali Intl altimeter setting and increase all DA 117 feet and all MDA 120 feet; increase LPV all Cats visibility ⅜ mile, LNAV/VNAV all Cats and Circling Cat C/D visibility ½ mile and LNAV Cat C/D visibility ¼ mile. For inoperative ODALS, increase LNAV/VNAV all Cats visibility to 1½ miles and LNAV Cat C/D visibility to 1¼ miles. DME/DME RNP-0.3 NA. VDP NA with Louisville Muhammad Ali Intl altimeter setting. For inoperative ODALS when using Louisville Muhammad Ali Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 2 miles and LNAV Cat C/D visibility to 1⅝ miles. Helicopter visibility reduction below ¾ SM NA.

NA

ODALS

MISSED APPROACH: Climb to 2400 direct NAYIV and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
119.425	124.775 269.45	122.8 (CTAF) L

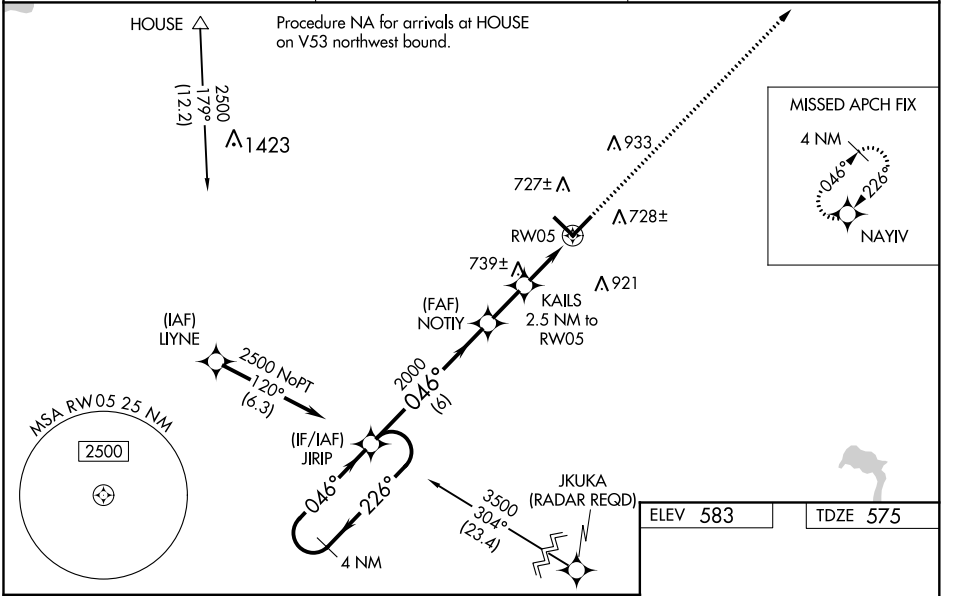

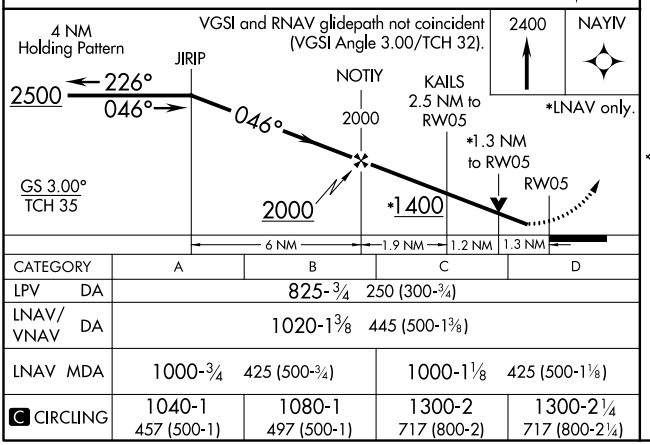

CATEGORY	A	B	C	D
LPV DA	825-¾ 250 (300-¾)			
LNAV/VNAV DA	1020-1⅜ 445 (500-1⅜)			
LNAV MDA	1000-¾ 425 (500-¾)		1000-1⅛ 425 (500-1⅛)	
C CIRCLING	1040-1 457 (500-1)	1080-1 497 (500-1)	1300-2 717 (800-2)	1300-2¼ 717 (800-2¼)

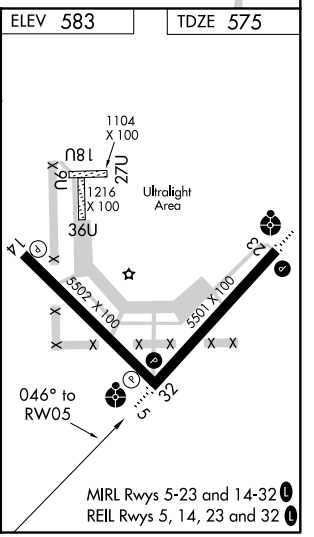

EC-2, 03 DEC 2020 to 31 DEC 2020
EC-2, 03 DEC 2020 to 31 DEC 2020