


VOR/DME ZZV <b>114.95</b> Chan <b>96 (Y)</b>	APP CRS <b>217°</b>	Rwy Idg TDZE <b>892</b> Apt Elev <b>900</b>	<b>4999</b>
--	------------------------	---	-------------

VOR RWY 22  
ZANESVILLE MUNI (ZZV)


▼ VDP NA when using Newark altimeter setting. When local altimeter setting not received, use Newark altimeter setting and increase all MDA 80 feet; increase S-22 Cat A visibility ¼ SM and Circling Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 3000 then right turn direct ZZV VOR/DME and hold.



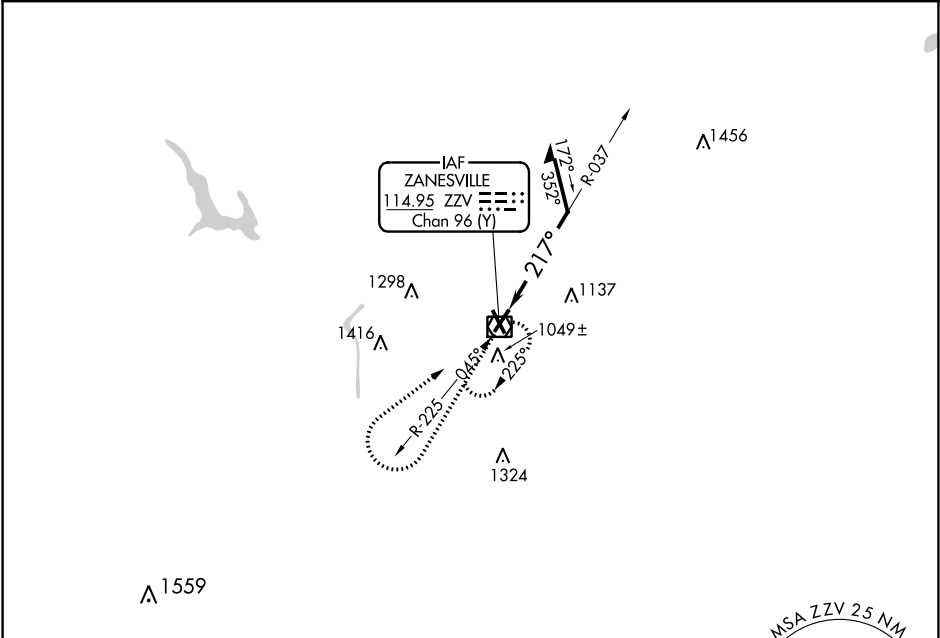


ASOS <b>114.95</b>	INDIANAPOLIS CENTER <b>124.45 370.9</b>	UNICOM <b>123.0 (CTAF) 0*</b>
-----------------------	--	----------------------------------



ELEV 900	TDZE 892
----------	----------



HIRL Rwy 4-22 0\*  
MIRL Rwy 16-34  
REIL Rwy 4, 16, 22 and 34 0\*

3000							
CATEGORY	A		B		C	D	
S-22	1720-1 828 (900-1)		1720-1¼ 828 (900-1¼)		1720-2½ 828 (900-2½)		
 CIRCLING	1720-1¼ 820 (900-1¼)		1720-2½ 820 (900-2½)		1720-2¾ 820 (900-2¾)		