
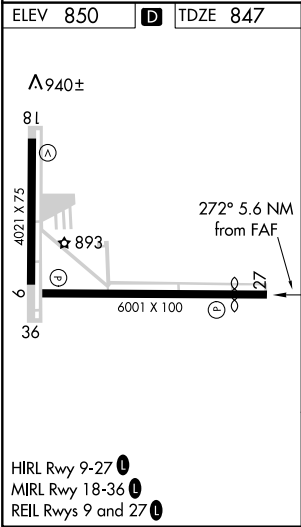


LOC/DME I-ASW	APP CRS	Rwy Idg	5100
<u>111.55</u>	<u>272°</u>	TDZE	847
Chan 52(Y)		Apt Elev	850

ILS or LOC/DME RWY 27
WARSAW MUNI (ASW)

<p>▼</p> <p>▲ NA</p> <p>When local altimeter setting not received, use Goshen altimeter setting and increase all DA/MDA 40 feet. Circling to Rwy 36 NA at night. VDP NA with Goshen altimeter setting. When VGSI inoperative, Circling Rwy 18 NA at night.</p>	<p>MISSED APPROACH: Climb to 1500 then climbing right turn to 2700 direct OLK VOR and hold.</p>
--	---

AWOS-3 121.125	FORT WAYNE APP CON 127.2 284.6	CINC DEL 134.05	UNICOM 122.7 (CTAF) 0
-------------------	-----------------------------------	--------------------	--------------------------

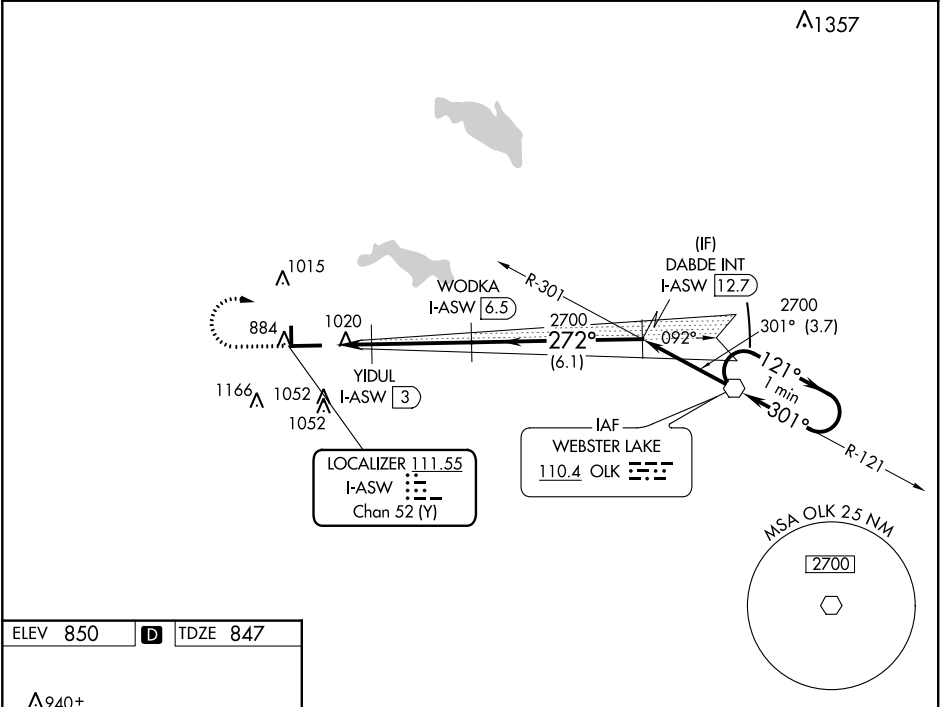

1500	2700	OLK	WODKA I-ASW [6.5]	DABDE INT I-ASW [12.7]	OLK VOR	One Minute Holding Pattern
*LOC only						
I-ASW [1]	*I-ASW [2.2]	YIDUL I-ASW [3]	2700	272°	301°	121° → 2700 ← 301°
*1540 2700						
GS 3.00° TCH 53						
1.2 0.8 3.6 NM 6.1 NM 3.7 NM						
CATEGORY	A		B		C	
S-ILS 27	1047-3/4		200 (200-3/4)			
S-LOC 27	1280-1	433 (500-1)	1280-1 1/4	433 (500-1 1/4)	1280-1 1/2	433 (500-1 1/2)
CIRCLING	1320-1	470 (500-1)	1320-1 1/2	470 (500-1 1/2)	1400-2	550 (600-2)