# RNAV (GPS) RWY 22R

## CHICAGO O'HARE INTL (ORD)

| WAAS | APP CRS | Rwy Idg | 7375 |
|---|---|---|---|
| CH 90504 | 223° | TDZE | 652 |
| W22A | | Apt Elev | 680 |

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 39°C (102°F). Simultaneous approach authorized with Rwy 22L. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 4000 direct EVRSN and on track 263° to DPA VOR/DME and hold.

| CHICAGO APP CON | O'HARE TOWERS | GND CON | (TWR CENTER) | CLNC DEL |
|---|---|---|---|---|
| 119.0 292.125 | 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L)<br>120.75 121.15 126.9 132.7 348.0 (CENTER) | 124.125 (TWR NORTH)<br>118.05 (TWR SOUTH)<br>226.675 (ALL TWRS) | 121.75 (OBND)<br>121.9 (IBND) | 121.6 |

D-ATIS 135.4 282.225

CPDLC

RADAR REQUIRED

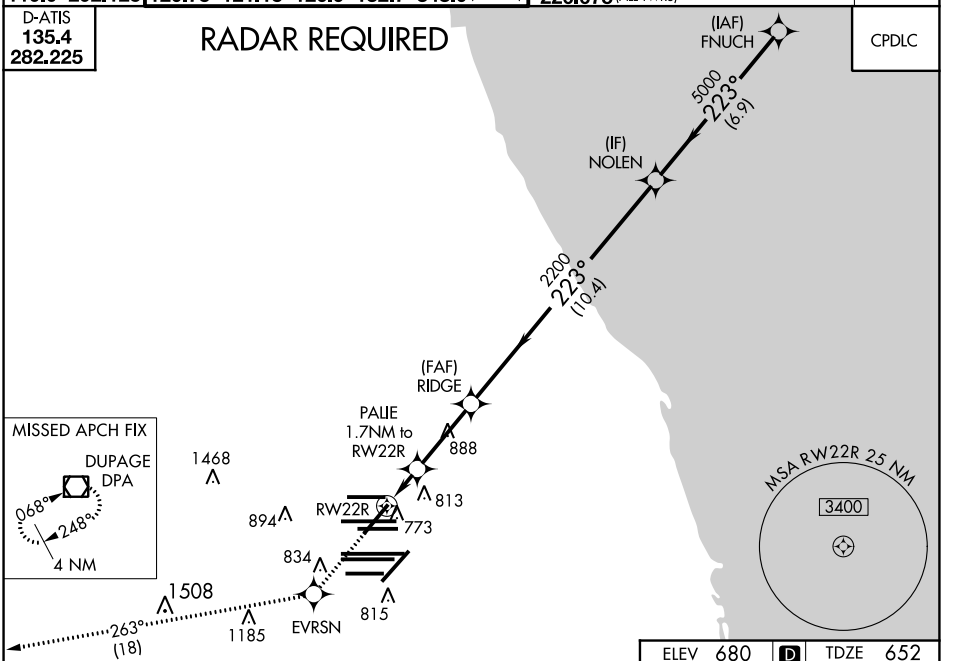


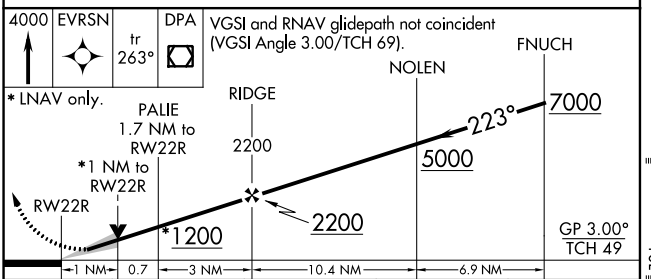


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | | 852/18 | 200 (200-½) | |
| LNAV/VNAV DA | | 972/32 | 320 (300-⅝) | |
| LNAV MDA | 1040/24 | 388 (400-½) | 1040/35 | 388 (400-⅝) |
| C CIRCLING | 1220-1 | 540 (600-1) | 1220-1½<br>540 (600-1½) | 1460-2½<br>780 (800-2½) |

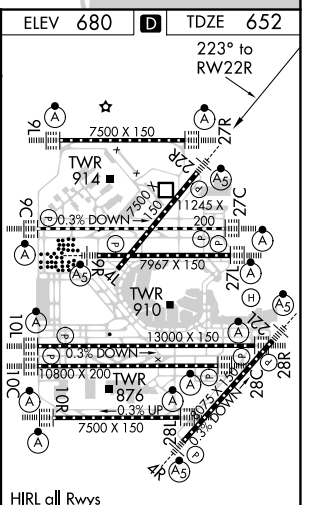




EC-3, 03 DEC 2020 to 31 DEC 2020
EC-3, 03 DEC 2020 to 31 DEC 2020