

WAAS CH 99508 W09B	APP CRS 093°	Rwy ldg 7500 TDZE 668 Apt Elev 680	RNAV (GPS) RWY 9L CHICAGO O'HARE INTL (ORD)
--	------------------------	---	---


RADAR required for procedure entry. RNP APCH.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C.

ALSIF-2

MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.

CHICAGO APP CON 119.0 292.125	O'HARE TOWERS 128.15 348.0 (Rwy 9L/27R) 133.0 348.0 (10R/28L) 120.75 121.15 126.9 132.7 348.0 (CENTER)	GND CON 124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRs)	(TWR CENTER) 121.75 (OBND) 121.9 (IBND)	CLNC DEL 121.6
D-ATIS 135.4 282.225			NORTHBROOK OBK 9 NM	CPDLC

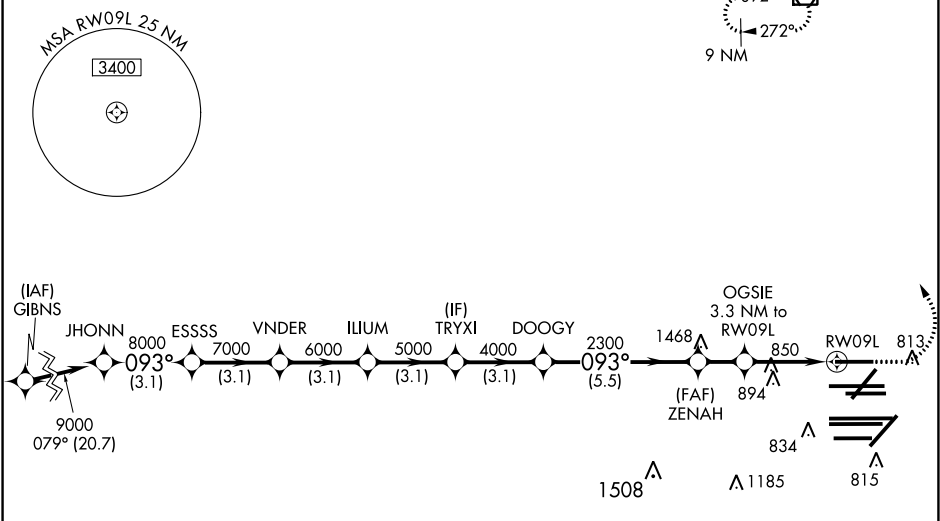

ELEV 680		TDZE 668	
093° to RW09L		1100 4000 OBK	
JHONN ESSSS VNDER ILIUM TRYXI DOOGY ZENAH OGSIE 3.3 NM to RW09L		*LNAV only.	
9000 8000 7000 6000 5000 4000 2300 *1760		*1.2 NM to RW09L	
GP 3.00° TCH 55		RW09L	
3.1 NM 3.1 NM 3.1 NM 3.1 NM 3.1 NM 5.5 NM 1.7 NM 2.1 1.2			
CATEGORY	A	B	C
LPV DA	868/18		200 (200-½)
LNAV/VNAV DA	1034/35		366 (400-¾)
LNAV MDA	1100/24	432 (500-½)	1100/40 432 (500-¾)
HIREL all Rwy's TDZ/CL all Rwy's except 4L			