RNAV (GPS) RWY 27

LAWRENCEVILLE-VINCENNES INTL (LWV)

WAAS	APP CRS	Rwy Idg	5198
CH 63028	271°	TDZE	430
W27A		Apt Elev	430

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Carmel altimeter setting. When local altimeter setting not received use Mount Carmel altimeter setting and increase all DA 26 feet and all MDA 40 feet: increase LNAV/VNAV all Cats visibility ⅛ mile. Inop table does not apply to LNAV Cat C. For inop ODALS increase LNAV/VNAV all Cats visibility to 1⅜ miles. For inop ODALS when using Mount Carmel altimeter setting increase LPV all Cats visibility to ⅞ mile, LNAV/VNAV all Cats visibility to 1½ miles and LNAV Cats C and D visibility to 1⅛ miles. Circling to Rwy 36 NA at night.

ODALS

MISSED APPROACH: Climb to 2600 direct ZUSPU and hold.

ASOS	EVANSVILLE APP CON ★	UNICOM
118.0	125.6 343.7	122.8 (CTAF) L

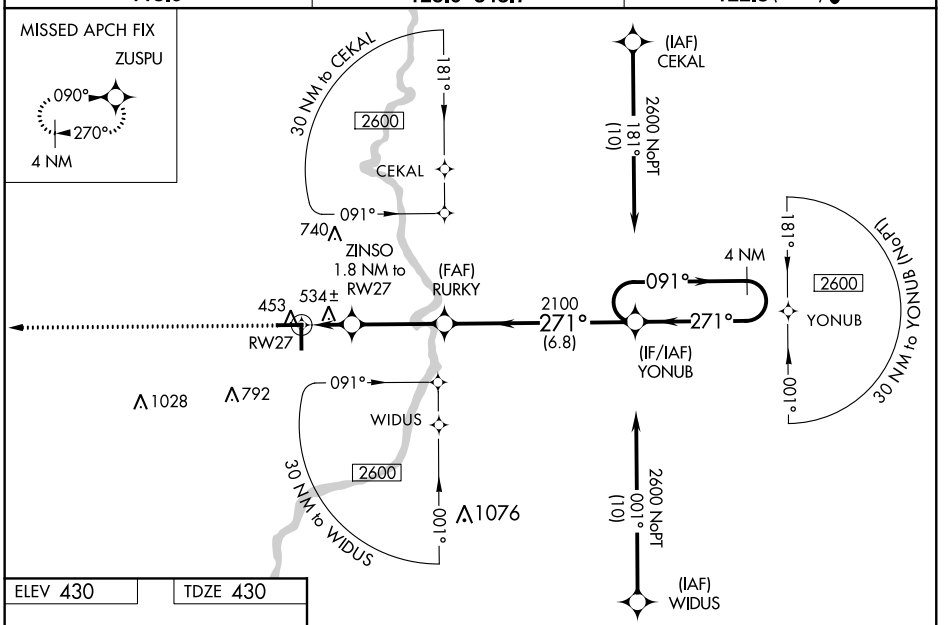

ELEV 430	TDZE 430



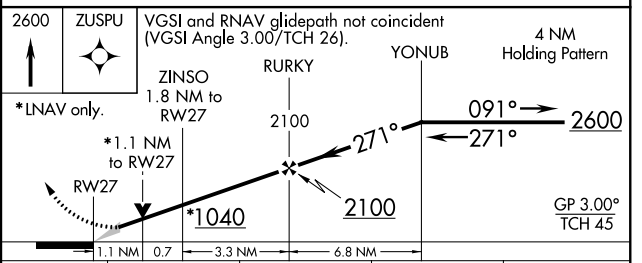

CATEGORY	A	B	C	D
LPV DA	680-¾ 250 (300-¾)			
LNAV/VNAV DA	832-1¼ 402 (500-1¼)			
LNAV MDA	800-¾ 370 (400-¾)		800-1 370 (400-1)	
CIRCLING	880-1 450 (500-1)		900-1½ 470 (500-1½)	980-2 550 (600-2)

REIL Rwys 9, 27, 18 and 36 L
MIRL Rwys 9-27 and 18-36 L

EC-3, 03 DEC 2020 to 31 DEC 2020
EC-3, 03 DEC 2020 to 31 DEC 2020