RNAV (GPS) RWY 9

LAWRENCEVILLE-VINCENNES INTL (LWV)

WAAS CH 93728 W09A	APP CRS 090°	Rwy ldg 5198 TDZE 428 Apt Elev 430

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Mount Carmel altimeter setting and increase all DA 26 feet and all MDA 40 feet: increase LPV all Cats, LNAV/VNAV all Cats, and LNAV Cat C/D visibilities ⅛ mile. Circling to Rwy 36 NA at night.

MISSED APPROACH: Climb to 2600 direct YONUB and hold.

ASOS	EVANSVILLE APP CON ★	UNICOM
118.0	125.6 343.7	122.8 (CTAF) L

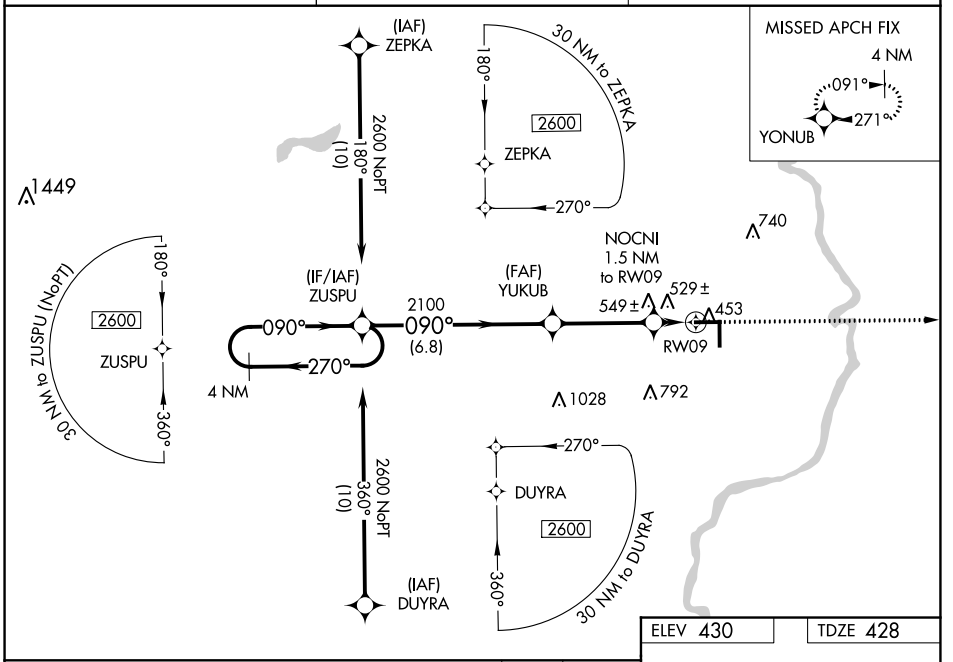

ELEV 430 TDZE 428

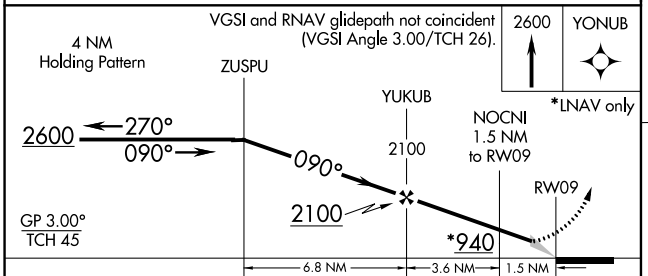



CATEGORY	A	B	C	D
LPV DA	678-¾ 250 (300-¾)			
LNAV/VNAV DA	829-1⅜ 401 (400-1⅜)			
LNAV MDA	820-1 392 (400-1)		820-1⅛ 392 (400-1⅛)	
CIRCLING	880-1 450 (500-1)		900-1½ 470 (500-1½)	980-2 550 (600-2)

REIL Rwys 9, 27, 18 and 36 L
MIRL Rwys 9-27 and 18-36 L

EC-3, 03 DEC 2020 to 31 DEC 2020
EC-3, 03 DEC 2020 to 31 DEC 2020