

APP CRS	Rwy Idg	6506
182°	TDZE	407
	Apt Elev	411

RNAV (GPS) RWY 18L

SOUTHERN ILLINOIS (MDH)


⚠

Inoperative table does not apply to LNAV Cat D. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F)

⚠


DME/DME RNP-0.3 NA. When local altimeter setting not received, use Williamson Co Rgnl altimeter setting and increase all DA 36 feet and all MDA 40 feet and increase LNAV/VNAV Cat A, B, C visibility ¼ mile. For inoperative MALSR, increase LNAV/VNAV Cat D visibility to 1 mile. Baro-VNAV NA when using Williamson Co Rgnl altimeter setting. VDP NA when using Williamson Co Rgnl altimeter setting. For inoperative MALSR when using Williamson Co Rgnl altimeter setting, increase LNAV Cat D visibility to 1¼ mile.


MALSR


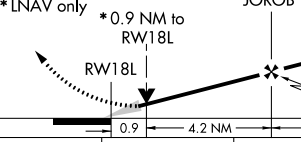


MISSED APPROACH: Climb to 2700 direct SOPAW and hold.

ATIS 119.725	KANSAS CITY CENTER 127.475 346.275	CARBONDALE TOWER ★ 125.35 (CTAF) 0 322.4	GND CON 121.8	UNICOM 122.95
-----------------	---------------------------------------	---	------------------	------------------

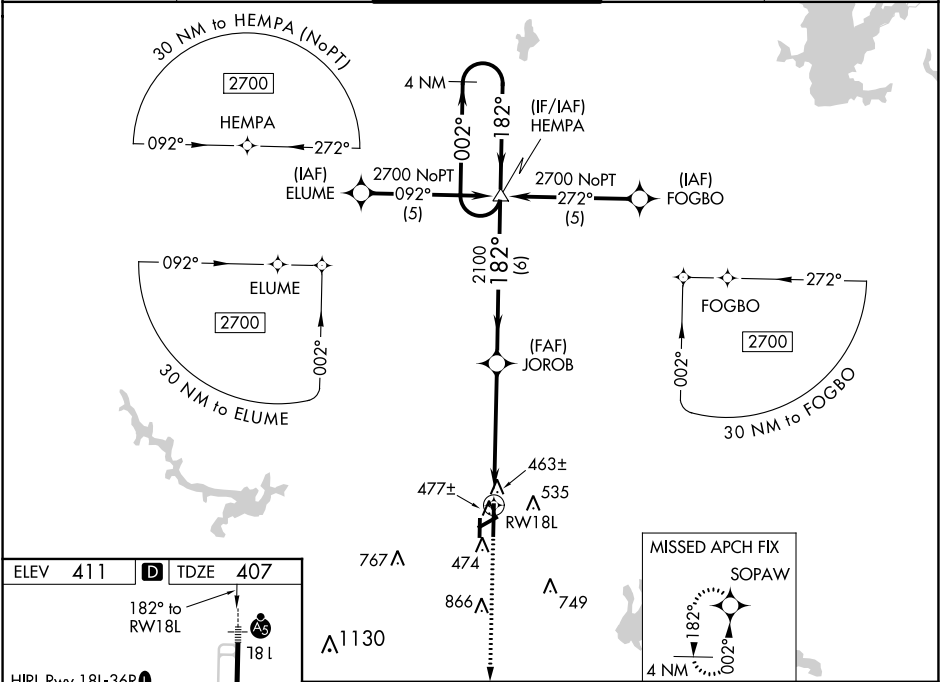

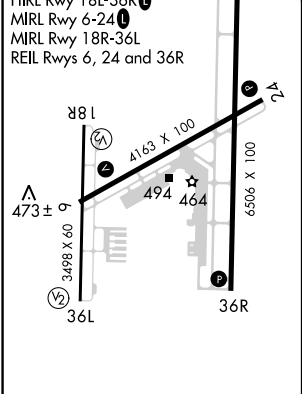

<div><div>2700</div><div>SOPAW</div><div></div></div>			
<div><div>*LNAV only</div><div></div></div>			
CATEGORY	A	B	C
LNAV/VNAV DA	726-½	319 (400-½)	
LNAV MDA	740-½	333 (400-½)	
CIRCLING	900-1	489 (500-1)	
		900-1½	489 (500-1½)
			980-2
			569 (600-2)

CARBONDALE-MURPHYSBORO, ILLINOIS

Orig 08APR10

37°47'N-89°15'W

SOUTHERN ILLINOIS (MDH)

RNAV (GPS) RWY 18L