
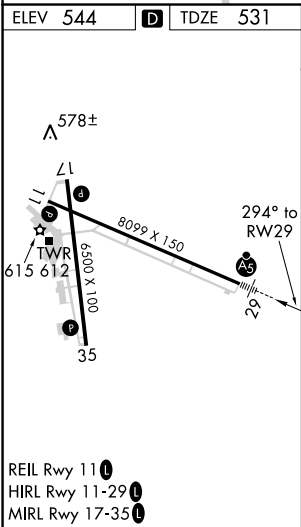


WAAS CH 77507 W29A	APP CRS 294°	Rwy Idg TDZE 531 Apt Elev 544	8099
--	------------------------	---	-------------

RNAV (GPS) RWY 29
ST LOUIS RGNL (ALN)

RNP APCH. <div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat C/D visibility to 1 SM.</div>	MALSR <div></div>	MISSED APPROACH: Climb to 2400 direct SQUAR and hold.
--	----------------------	--

ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER* 126.0 (CTAF) 0 239.0	GND CON 120.2	CLNC DEL 120.2 (when tower closed)	UNICOM 122.95
----------------------	--	--	-------------------------	---	-------------------------

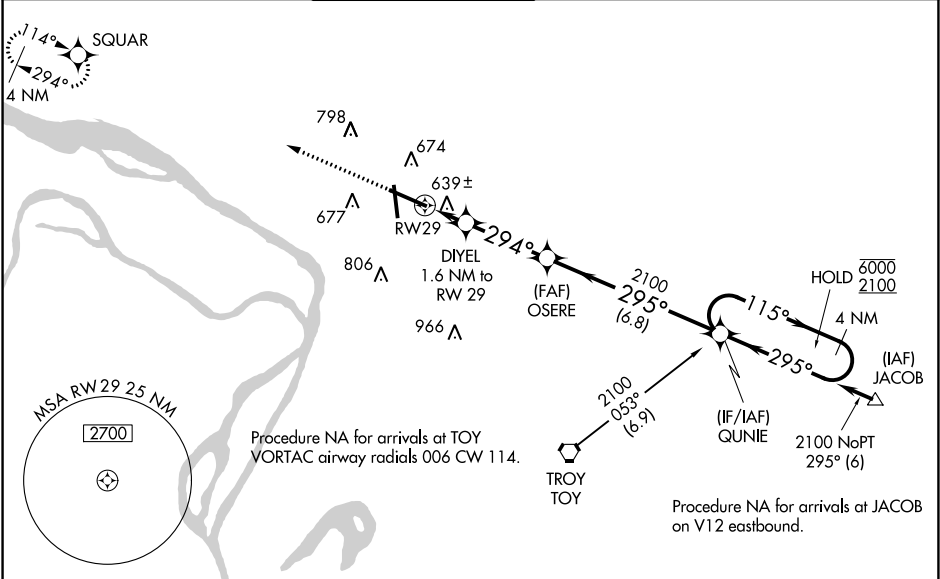

ELEV 544	D	TDZE 531
<div>REIL Rwy 11-1 HIRL Rwy 11-29 MIRL Rwy 17-35</div>		
<div>1068</div>		
<div>2400 SQUAR</div>		
<div>*LNAV only.</div>		
<div>DIYEL 1.6 NM to RW29</div>		
<div>OSERE 2100</div>		
<div>QUNIE 2100</div>		
<div>4 NM Holding Pattern</div>		
<div>GP 3.00° TCH 55</div>		
CATEGORY	A	B
LPV DA	731-½	200 (200-½)
LNAV/VNAV DA	825-½	294 (300-½)
LNAV MDA	900-½ 369 (400-½)	900-¾ 369 (400-¾)
CIRCLING	1000-1 456 (500-1)	1000-1½ 456 (500-1½)