RNAV (GPS) RWY 21

GALESBURG MUNI (GBG)

WAAS CH 50428 W21A	APP CRS 205°	Rwy Idg 5792 TDZE 764 Apt Elev 764

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 39°C (102°F). Circling Rwy 10 NA at night. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Macomb altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV visibility to ⅞ SM all Cats, increase LNAV/VNAV visibility to 1¼ SM all Cats, increase LNAV Cats C/D visibility to 1⅜ SM. VDP and Baro-VNAV NA when using Macomb altimeter setting.

MISSED APPROACH: Climb to 1700 then climbing right turn to 3000 direct EJIYU and hold.

AWOS-3	QUAD CITY APP CON *	CLNC DEL	UNICOM
118.975	133.275 257.8	120.7	123.0 (CTAF)

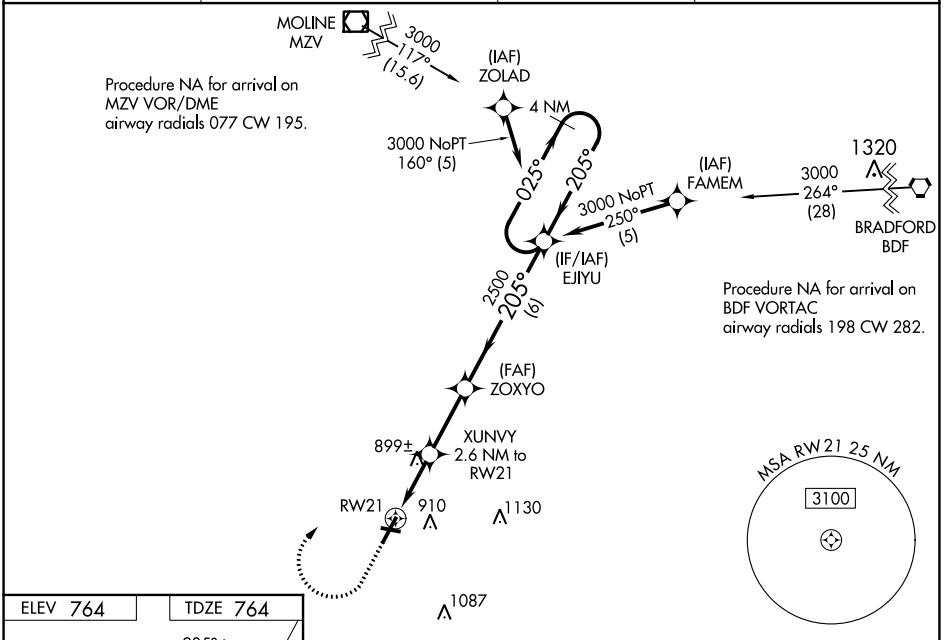

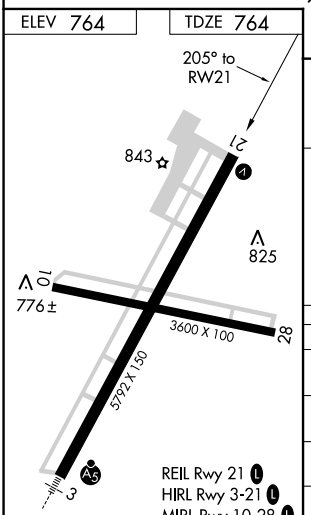

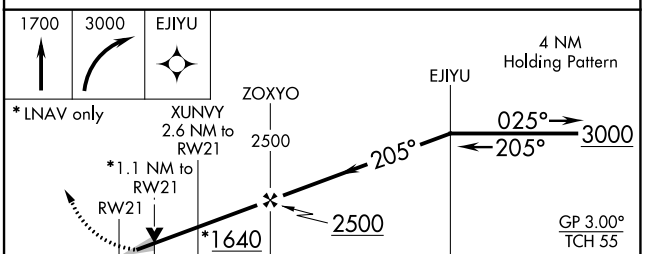

CATEGORY	A	B	C	D
LPV DA	964-¾ 200 (200-¾)			
LNAV/VNAV DA	1060-⅞ 296 (300-⅞)			
LNAV MDA	1160-1 396 (400-1)		1160-1⅛ 396 (400-1⅛)	
CIRCLING	1220-1 456 (500-1)		1220-1½ 456 (500-1½)	1340-2 576 (600-2)

EC-3, 03 DEC 2020 to 31 DEC 2020
EC-3, 03 DEC 2020 to 31 DEC 2020