

LOC I-CPS	APP CRS	Rwy Idg	7002
109.1	302°	TDZE	412
		Apt Elev	413

ILS or LOC RWY 30L


ST LOUIS DOWNTOWN (CPS)

⚠ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase DA to 674 feet, increase all MDAs 80 feet and visibility S-LOC 30L and Circling Cats C/D ¼ SM. For inop ALS when using St Louis Lambert Intl altimeter setting, increase S-ILS 30L visibility ½ SM. Circling Rwy 5 NA at night.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2200 on heading 080° and on I-CPS SE course (122°) to EBOPE INT and hold.

ATIS	ST LOUIS APP CON	DOWNTOWN TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
121.45	123.7 371.875	119.925 (CTAF) 0 379.3	121.8	118.275	121.8 (when twr closed)	122.95

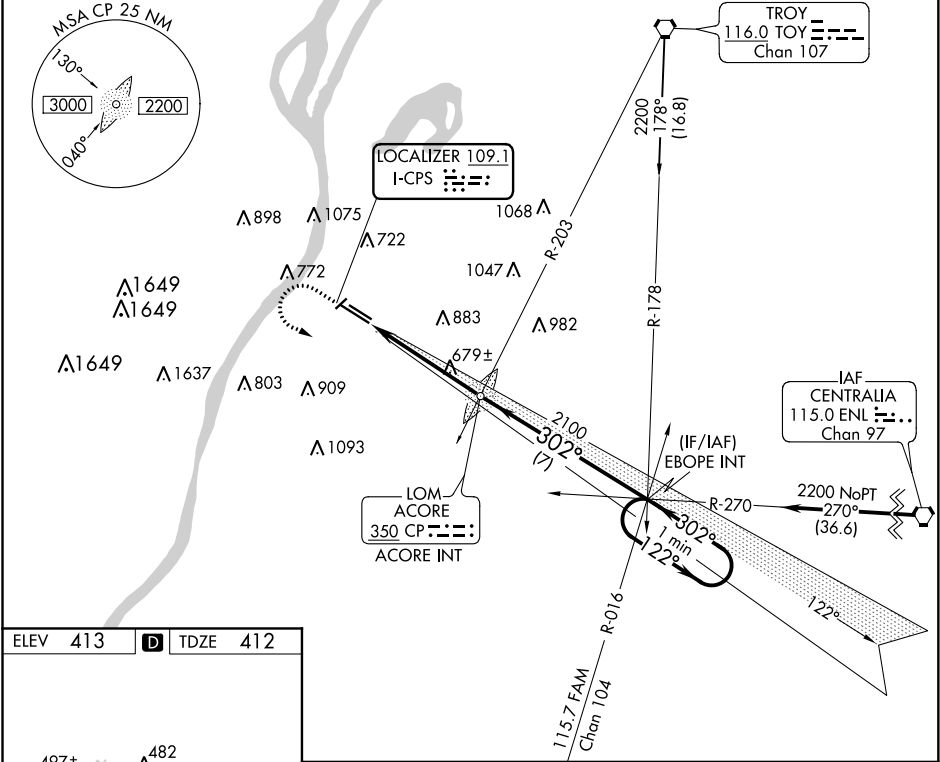

ELEV 413

D

TDZE 412

HIRL Rwy 12R-30L  
REIL Rwys 12L and 12R  
REIL Rwy 30R  
MIRL Rwys 5-23 and 12L-30R  
FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

CATEGORY	A		B		C		D	
	S-ILS 30L		612-½		200 (200-½)			
S-LOC 30L	940-½		528 (600-½)		940-1 528 (600-1)		940-1¼ 528 (600-1¼)	
	CIRCLING		940-1 527 (600-1)		1000-1½ 587 (600-1½)		1080-2 667 (700-2)	