


WAAS CH <b>72630</b> <b>W11A</b>	APP CRS <b>111°</b>	Rwy Idg <b>5001</b> TDZE <b>1152</b> Apt Elev <b>1171</b>
--	------------------------	---

RNAV (GPS) RWY 11  
IOWA COUNTY (MRJ)

**T** Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV and LNAV/VNAV all Cats visibility ½ mile, increase all MDA 60 feet, and LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA.

**MISSED APPROACH:**  
Climb to 3600 direct  
YECNU and hold.

AWOS-3 <b>118.525</b>	CHICAGO CENTER <b>133.95 281.4</b>	UNICOM <b>122.8</b> (CTAF) <b>0</b>
--------------------------	---------------------------------------	--

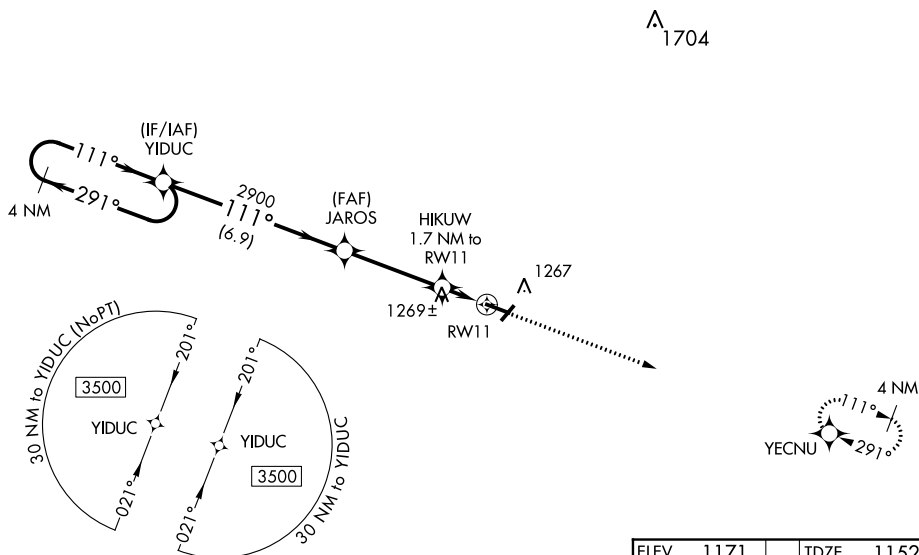

4 NM Holding Pattern

VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 61).

YIDUC

3500

291°

111°

JAROS 2900

HIKUW 1.7 NM to RW11

\*1 NM to RW11

\*1700

GP 3.00° TCH 40

6.9 NM

3.7 NM

0.7 NM

\* LNAV only

YECNU

CATEGORY	A	B	C	D
LPV DA	1352- $\frac{3}{4}$	200 (200- $\frac{3}{4}$ )		NA
LNAV/VNAV DA	1402- $\frac{7}{8}$	250 (300- $\frac{7}{8}$ )		NA
LNAV MDA	1520-1	368 (400-1)	1520-1 $\frac{1}{8}$ 368 (400-1 $\frac{1}{8}$ )	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1 $\frac{1}{2}$ 469 (500-1 $\frac{1}{2}$ )	NA

