

LOC I-JOU <u>111.1</u>	APP CRS 210°	Rwy Idg 8999 TDZE 1430 Apt Elev 1430
----------------------------------	------------------------	---

ILS or LOC RWY 21
JOE FOSS FIELD (FSD)




 ASR
 -31°C

For inoperative MALSR increase S-ILS all Cats visibility to $\frac{3}{4}$ mile, increase S-LOC 21 Cat C/D visibility to $1\frac{7}{8}$ mile. When using WADRI FIX minimums, increase S-LOC 21 Cat C/D visibility to 1 mile.



MISSED APPROACH: Climb to 3400 then right turn direct FSD VORTAC and hold.

ATIS 126.6	SIoux FALLS APP CON ★ 125.8 284.725	SIoux FALLS TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
---------------	--	---	------------------------	------------------

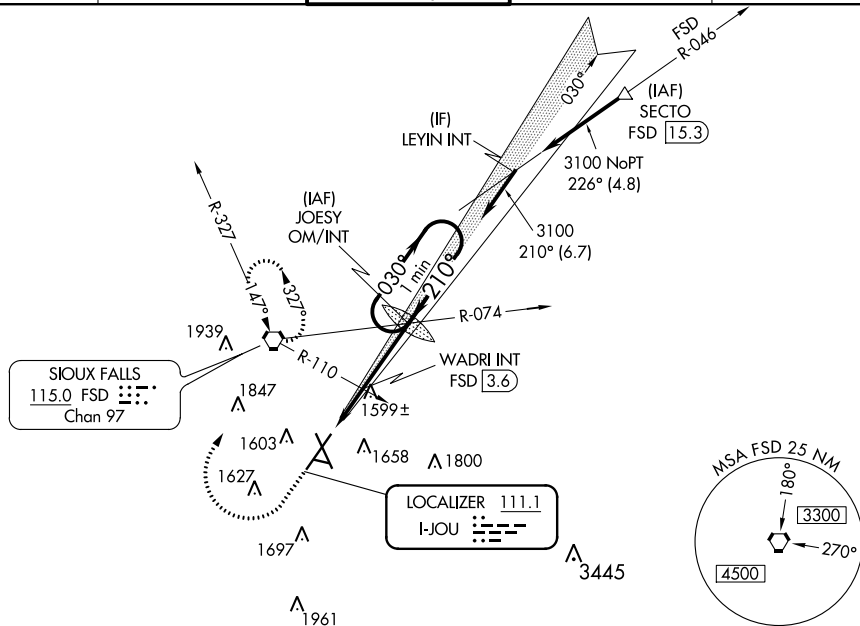

ELEV 1430 **D** TDZE 1430

210° 4.9 NM from FAF

8999 X 150

8000 X 150

3148 X 75

1470

1523

1567

TDZ/CL Rwy 21

REIL Rwys 15 and 33

MIRL Rwy 9-27

HIRL Rwys 3-21 and 15-33

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

