




| | | |
|--|------------------------|---|
| WAAS CH 97722 W03A | APP CRS 030° | Rwy Idg 8999 TDZE 1424 Apt Elev 1430 |
|--|------------------------|---|

RNAV (GPS) RWY 3

JOE FOSS FIELD (FSD)

RNP APCH.



| | |
|---|---|
|  | For uncompensated Baro-VNAV systems, LNAV/VNAV NA below |
|  | -17°C (2°F) or above 54°C (130°F). For inop ALS, increase |
| ASR | LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C/D |
|  | visibility to 1 3/8 SM. |
| -31°C | |

MALSR



MISSED APPROACH: Climb to 4000
direct MOPUE and hold.

| | | | | |
|---------------|---------------------------------------|--|------------------------|------------------|
| ATIS 126.6 | SIoux FALLS APP CON★ 125.8 284.725 | SIoux FALLS TOWER★ 118.3 (CTAF) 0 257.8 | GND CON 121.9 348.6 | UNICOM 122.95 |
|---------------|---------------------------------------|--|------------------------|------------------|

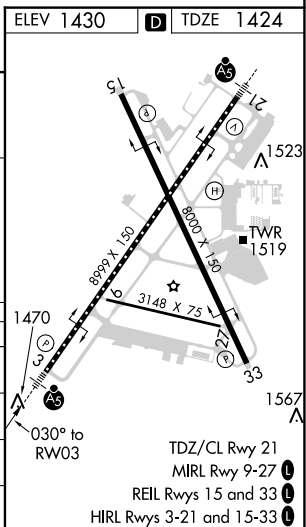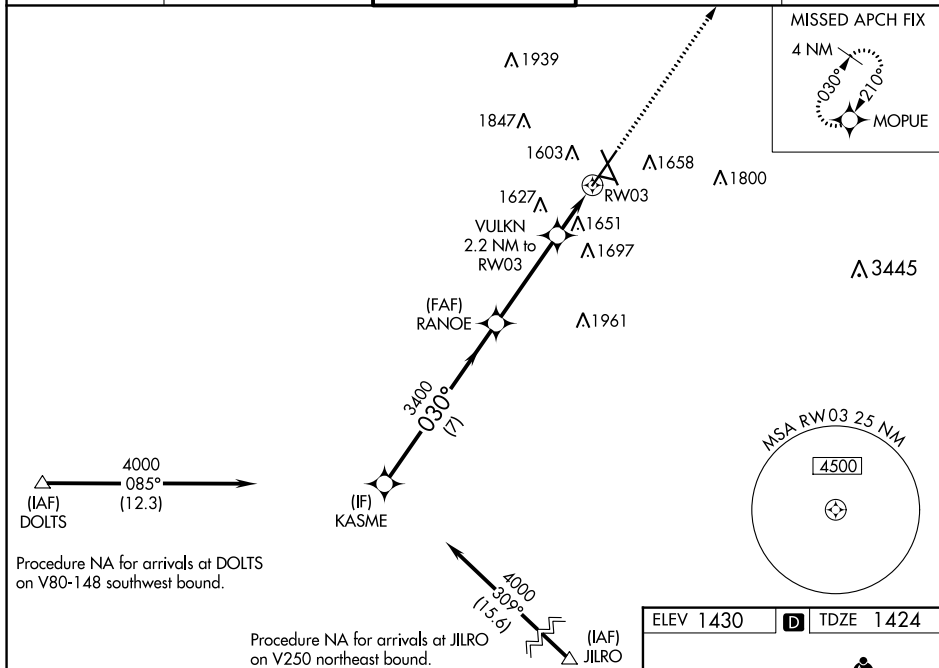

RNAV (GPS) RWY 3