


WAAS CH <b>82633</b> <b>W05A</b>	APP CRS <b>054°</b>	Rwy Idg TDZE Apt Elev	<b>3601</b> <b>3199</b> <b>3204</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 5  
RAPID CITY RGNL (RAP)


**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Ellsworth AFB altimeter setting and increase all DA 25 feet and all MDA 40 feet. VDP and Baro-VNAV NA with Ellsworth AFB altimeter setting.

MISSED APPROACH: Climb to 5300 direct EWEBU and hold.

ASOS <b>118.525</b>	ELLSWORTH APP CON ★ <b>119.5 259.1</b>	RAPID CITY TOWER ★ <b>125.85 (CTAF) 0 257.8</b>	GND CON <b>121.9</b>	UNICOM <b>122.95</b>
------------------------	---	--	-------------------------	-------------------------

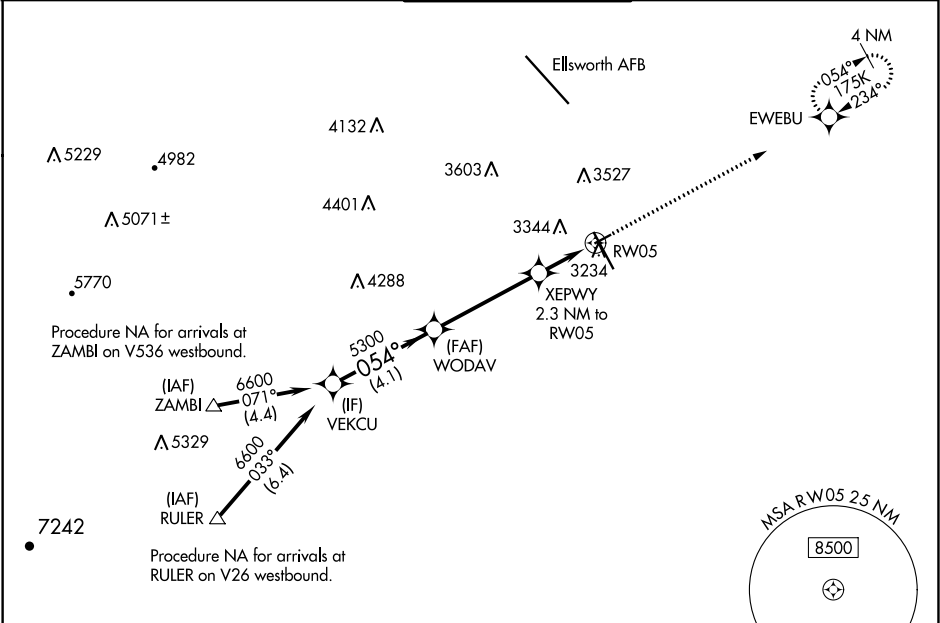

ELEV 3204	<b>D</b>	TDZE 3199
-----------	----------	-----------

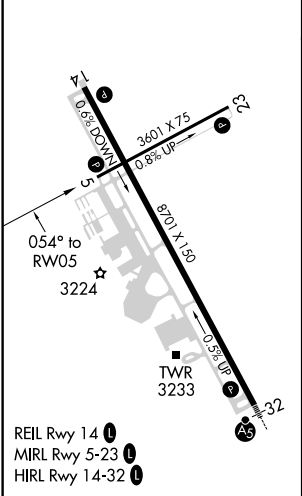

VEKCU		WODAV		XEPWY		EWEBU	
6600		5300		5300		5300	
GP 3.00°		054°		*3920		*LNAV only.	
TCH 34		4.1 NM		4.3 NM		1.4 NM	
CATEGORY		A		B		C	
LPV DA		3449-1		250 (300-1)		NA	
LNAV/VNAV DA		3449-1		250 (300-1)		NA	
LNAV MDA		3500-1		301 (300-1)		NA	
CIRCLING		3660-1		3840-1		NA	
		456 (500-1)		636 (700-1)			