



WAAS CH 65917 W25A	APP CRS 253°	Rwy Idg TDZE 1389 Apt Elev 1391
--	------------------------	---

RNAV (GPS) RWY 25

BEMIDJI RGNL (BJI)

RNP APCH.	MISSED APPROACH: Climb to 3400 direct TUCTU and on track 178° to CEUS and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C.	

AWOS-3 119.275	MINNEAPOLIS CENTER 134.75 251.1	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

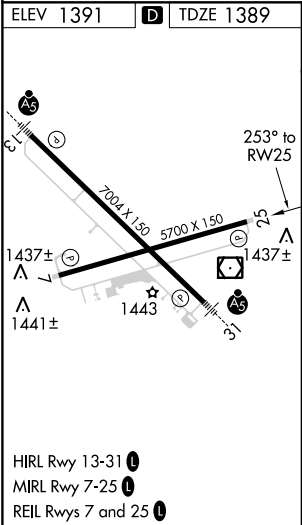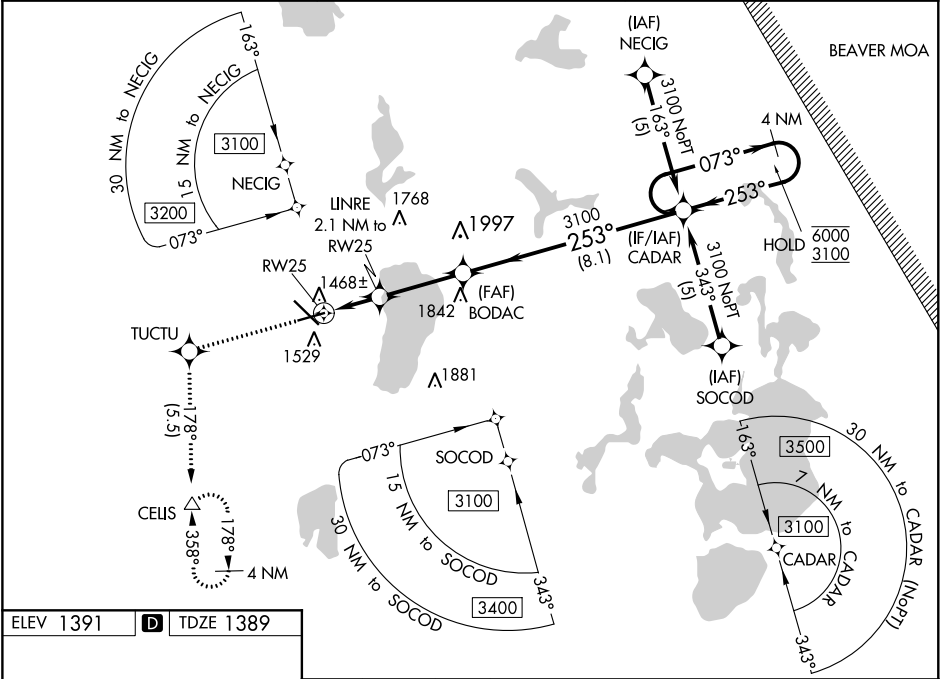

3400	TUCTU	tr 178°	CEUS	BODAC	CADAR	4 NM Holding Pattern
*LNAV only.						
LINRE 2.1 NM to RW25						
*1.3 NM to RW25						
1.3 NM 0.8 3.1 NM 8.1 NM						
CATEGORY	A	B	C	D		
LPV DA	1589-3/4		200 (200-3/4)			
LNAV/VNAV DA	1752-1/4		363 (400-1/4)			
LNAV MDA	1840-1	451 (500-1)	1840-1 3/8 451 (500-1 3/8)	1840-1 1/2 451 (500-1 1/2)		
C CIRCLING	1840-1 449 (500-1)	1860-1 469 (500-1)	1860-1 1/2 469 (500-1 1/2)	1960-2 569 (600-2)		