RNAV (GPS) RWY 36

WORTHINGTON MUNI (OTG)

WAAS	APP CRS	Rwy Idg	4200
CH 99329	358°	TDZE	1574
W36A		Apt Elev	1574

Baro-VNAV NA when using Jackson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Jackson altimeter setting and increase all DA 78 feet and MDA 80 feet, increase LPV all Cats, LNAV Cat C/D and Circling Cat C visibility ¼ mile and LNAV/VNAV all Cats visibility ⅜ mile.

MISSED APPROACH: Climb to 3300 direct JIMED and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
121.075	132.05 317.4	122.8 (CTAF) L

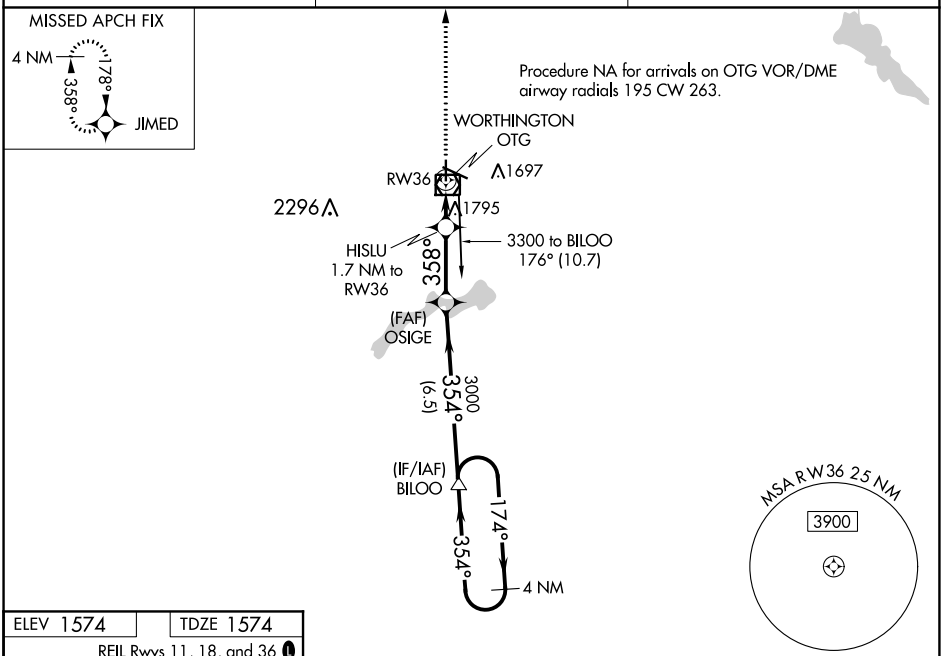

ELEV 1574	TDZE 1574

REIL Rwys 11, 18, and 36 L
MIRL Rwy 18-36 L
HIRL Rwy 11-29 L

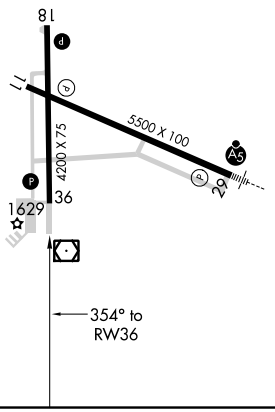

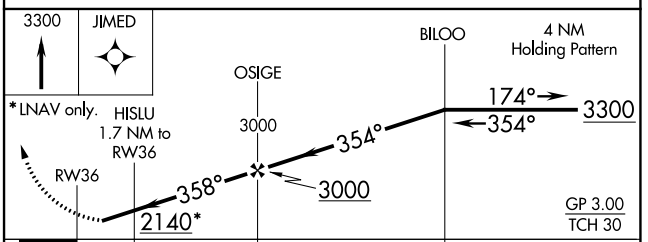

CATEGORY	A	B	C	D
LPV DA	1824-1 250 (300-1)			
LNAV/VNAV DA	2095-1⅞ 521 (600-1⅞)			
LNAV MDA	2060-1 486 (500-1)		2060-1⅜ 486 (500-1⅜)	
CIRCLING	2100-1 526 (600-1)		2100-1½ 526 (600-1½)	2140-2 566 (600-2)

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020