

| | | | |
|----------------|-------------|----------|-------------|
| VOR/DME MHE | APP CRS | Rwy Idg | 6700 |
| 109.2 | 117° | TDZE | 1301 |
| Chan 29 | | Apt Elev | 1304 |



VOR RWY 13

MITCHELL MUNI (MHE)

V VDP NA with Huron Rgnl altimeter setting. If local altimeter setting not received, use Huron Regional altimeter setting and increase all MDAs 100 feet. Increase S-13 and Circling Cat C visibility ¼ mile, increase GEBEL fix minimums S-13 Cat C visibility ⅜ mile and Cat D ⅙ mile.

MISSED APPROACH: Climb to 2900 then climbing left turn to 3000 direct MHE VOR/DME and hold.

| | | |
|------------------------|---|---------------------------------|
| ASOS 124.175 | MINNEAPOLIS CENTER 126.25 339.8 | UNICOM 122.8 (CTAF) 0 |
|------------------------|---|---------------------------------|

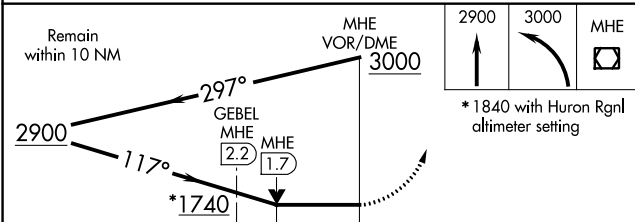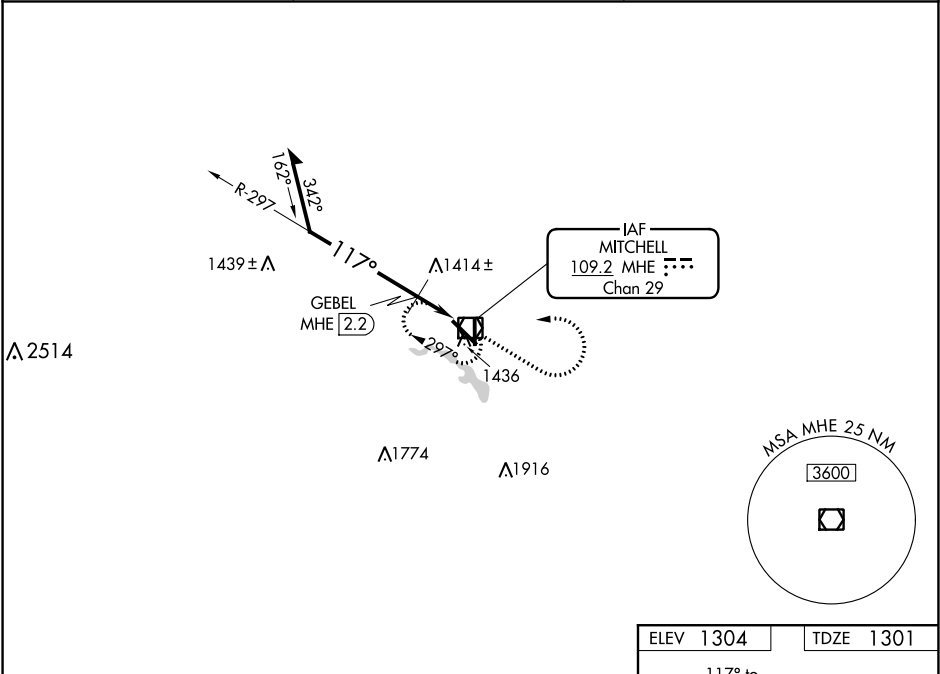

| CATEGORY | A | B | C | D |
|--------------------|-----------------------|-----------------------|-------------------------|-------------------------|
| S-13 | 1740-1 | 439 (500-1) | 1740-1¼ 439 (500-1¼) | 1740-1½ 439 (500-1½) |
| C CIRCLING | 1740-1 436 (500-1) | 1760-1 456 (500-1) | 1820-1½ 516 (600-1½) | 1860-2 556 (600-2) |
| GEBEL FIX MINIMUMS | | | | |
| S-13 | 1680-1 | 379 (400-1) | 1680-1¼ 379 (400-1¼) | |
| C CIRCLING | 1740-1 436 (500-1) | 1760-1 456 (500-1) | 1820-1½ 516 (600-1½) | 1860-2 556 (600-2) |

