


VOR/DME DVL	APP CRS	Rwy Idg	6401
114.75	138°	TDZE	1470
Chan 94(Y)		Apt Elev	1470

VOR RWY 13

DEVILS LAKE RGNL (DVL)

<div><div>V</div><div>A</div></div> <div>VDP NA with Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase all MDA 80 feet, and increase S-13 and Circling Cats C and D visibility ¼ mile, increase ZUDUB fix minimums S-13 and Circling Cats C and D visibility ¼ mile.</div>		MISSED APPROACH: Climb to 3100 then left turn direct DVL VOR/DME and hold.
AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
125.875	124.2 270.3	122.8 (CTAF) 0

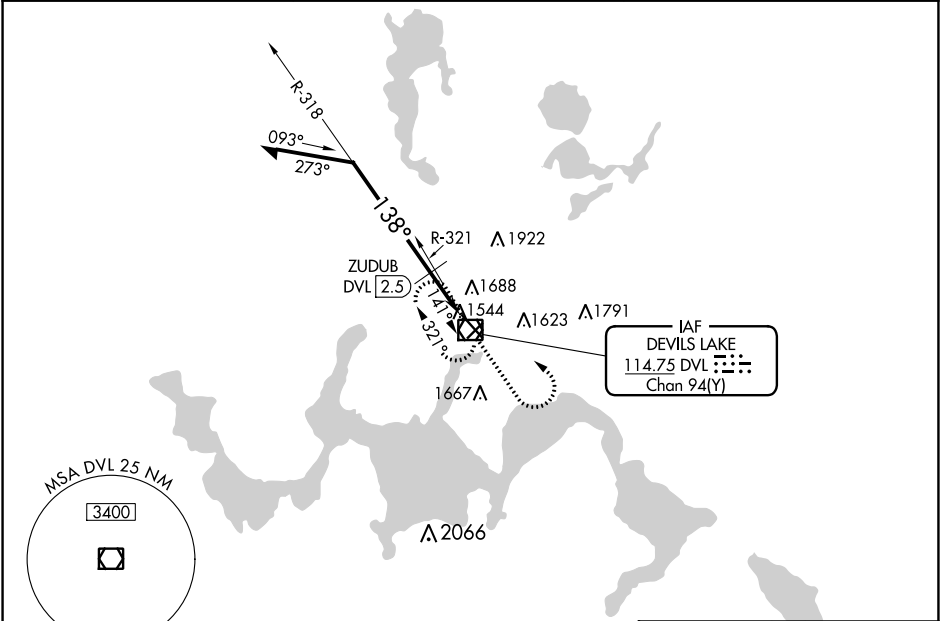

ELEV 1470		D		TDZE 1470	
<div><div><div>Remain within 10 NM</div><div>3100</div><div>318°</div><div>ZUDUB DVL 2.5</div><div>DVL 1.9</div><div>2.92°</div><div>TCH 45</div><div>*2100</div><div>0.6 NM</div><div>1.3 NM</div><div>DVL VOR/DME</div><div>3100</div><div>DVL</div><div>*2180 when using Cando altimeter setting.</div></div><div><div><div>138° to VOR/DME</div><div>1500</div><div>A1483</div><div>6401 X 100</div><div>0.43°</div><div>1472</div><div>A1472</div><div>1500</div><div>4314 X 75</div><div>UP</div><div>0.43°</div><div>1472 A</div></div></div></div>					
CATEGORY	A	B	C	D	
S-13	2100-1	630 (700-1)	2100-1¾	630 (700-1¾)	
CIRCLING	2100-1	630 (700-1)	2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)	
ZUDUB FIX MINIMUMS (DME REQUIRED)					
S-13	1940-1	470 (500-1)	1940-1⅜	470 (500-1⅜)	
CIRCLING	2000-1	530 (600-1)	2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)	
HIRL Rwy 13-31 0					
REIL Rwy 3, 13 and 21 0					
MIRL Rwy 3-21 0					