RNAV (GPS) RWY 31

FAIRMONT MUNI (FRM)

WAAS CH 90412 W31A	APP CRS 310°	Rwy Idg 5503 TDZE 1162 Apt Elev 1162

RNP APCH.

For uncompensated Baro-VNAV systems, procedure NA below -17° C or above 54°C. For inop ALS , increase LPV all Cats visibility to ⅞ SM and LNAV/VNAV all Cats visibility to 1⅛ SM and LNAV Cat C/D visibility to 1⅛ SM.

MALSR

MISSED APPROACH: Climb to 3100 direct UCEVA and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
120.025	127.75 257.7	122.8 (CTAF) L

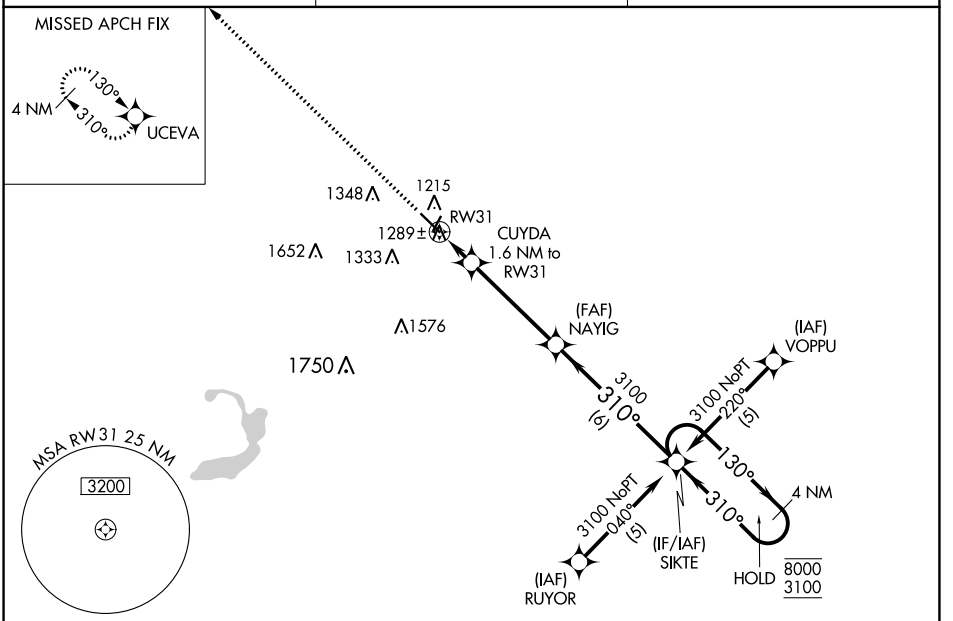

ELEV 1162 TDZE 1162

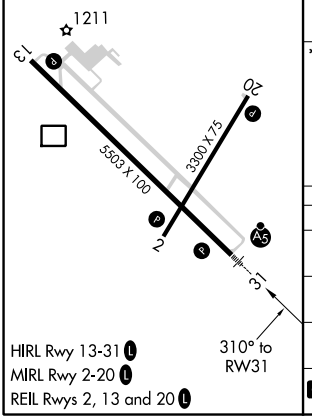

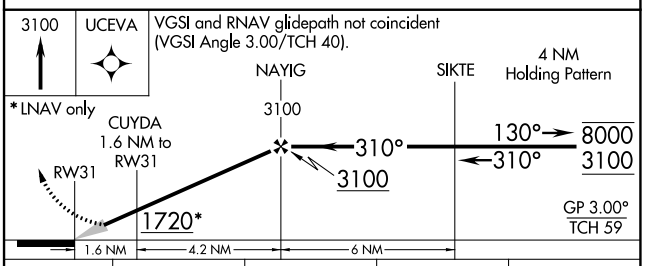

CATEGORY	A	B	C	D
LPV DA	1467-½ 305 (400-½)			
LNAV/VNAV DA	1581-1 419 (500-1)			
LNAV MDA	1560-½ 398 (400-½)		1560-⅝ 398 (400-⅝)	1560-1 398 (400-1)
C CIRCLING	1640-1 478 (500-1)	1660-1 498 (500-1)	1980-2¼ 818 (900-2¼)	1980-2½ 818 (900-2½)

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020