
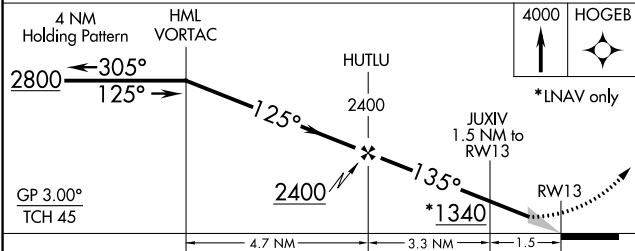


WAAS CH 40333 W13A	APP CRS 135°	Rwy Idg TDZE 820 Apt Elev 820
--	------------------------	---

RNAV (GPS) RWY 13
HALLOCK MUNI (HCO)


RNP APCH.	MISSED APPROACH: Climb to 4000 direct HOGEB and hold.
Baro-VNAV NA. When local altimeter setting not received, use Grafton, ND altimeter setting and increase all DA 63 feet and all MDA 80 feet; increase LNAV/VNAV all Cats visibility 1/8 mile, LNAV Cat C visibility 3/8 mile; Circling Cat C visibility 1/4 mile.	

AWOS-3 126.475	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

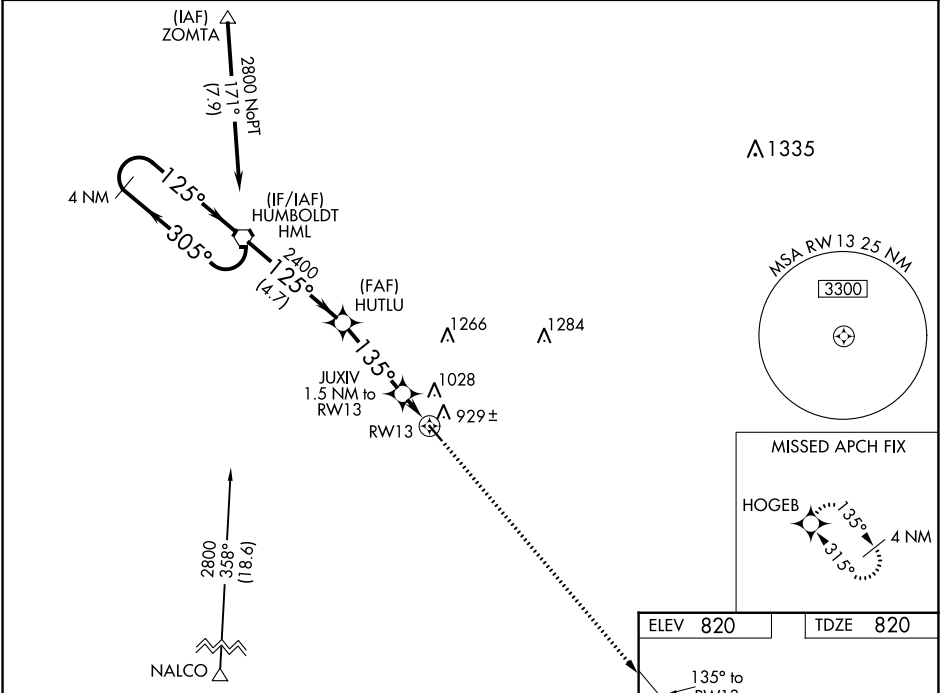

CATEGORY	A	B	C	D
LPV DA	1070-1	250 (300-1)		NA
LNAV/VNAV DA	1213-1 3/8	393 (400-1 3/8)		NA
LNAV MDA	1180-1	360 (400-1)		NA
CIRCLING	1380-1	560 (600-1)	1380-1 1/2 560 (600-1 1/2)	NA

ELEV 820	TDZE 820
----------	----------



REIL Rwy 13 and 31 0
MIRL Rwy 13-31 0