RNAV (GPS) RWY 34
DODGE CENTER (TOB)

WAAS	APP CRS	Rwy Idg	4500
CH 45633	344°	TDZE	1304
W34A		Apt Elev	1304

T A Baro-VNAV NA when using Rochester Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rochester Intl altimeter setting and increase all DA 39 feet and all MDA 40 feet, and increase LNAV Cat C visibility ⅛ mile and Circling Cat C visibility ¼ mile. Rwy 34 Straight-in and Circling minimums NA at night.

MISSED APPROACH: Climb to 3000 direct JOPSU and hold.

AWOS-3	ROCHESTER APP CON ★	CTAF
119.075	119.8 251.125	122.9 L

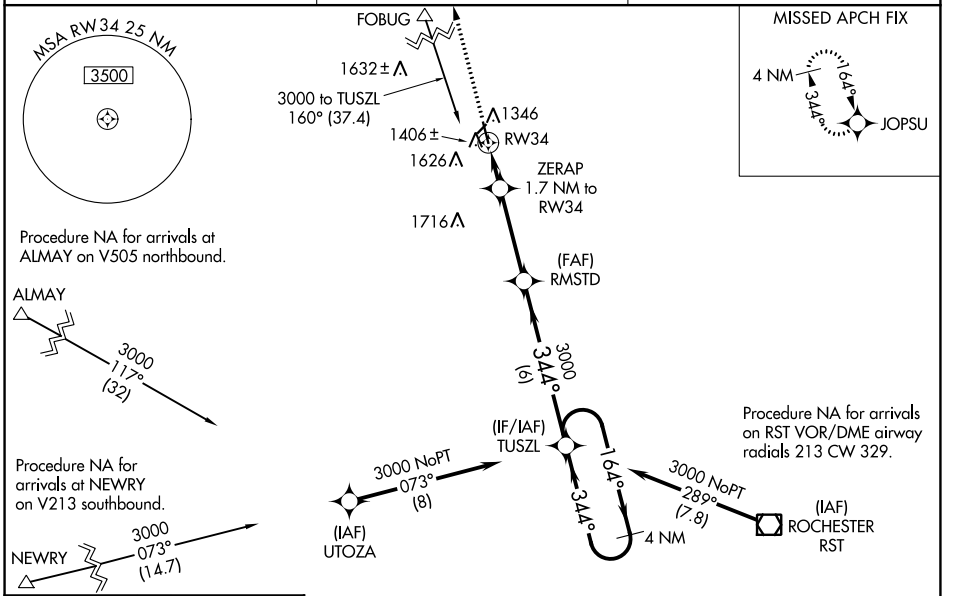

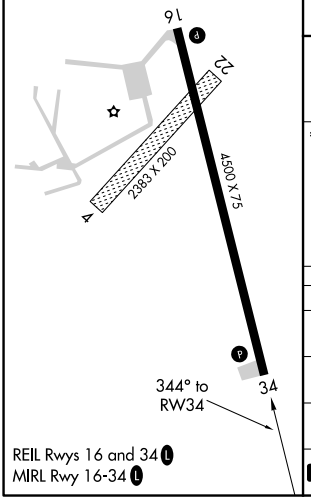

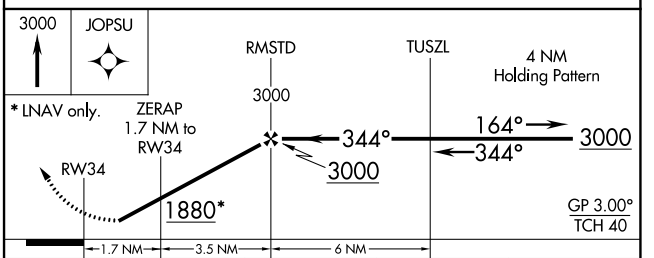

CATEGORY	A	B	C	D
LPV DA	1554-1 250 (300-1)			NA
LNAV/VNAV DA	1556-1 252 (300-1)			NA
LNAV MDA	1660-1 356 (400-1)			NA
C CIRCLING	1960-1 656 (700-1)		1960-1¾ 656 (700-1¾)	NA

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020