


WAAS CH 58033 W16A	APP CRS 159°	Rwy Idg TDZE Apt Elev	4007 1368 1368
----------------------------------------	------------------------	-----------------------------	-------------------------------------------

RNAV (GPS) RWY 16
WADENA MUNI (ADC)

⚠ DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. VDP and Baro-VNAV NA with Staples altimeter setting. When local altimeter setting not received, use Staples altimeter setting and increase all DA 52 feet and all MDA 60 feet, increase LNAV/VNAV visibility 1/8 mile, LNAV Cat C visibility 1/4 mile and Circling Cat C visibility 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (1°F) or above 54°C (130°F).

MISSED APPROACH:
Climb to 3300 direct JOLIT and hold.

AWOS-3 128.325	MINNEAPOLIS CENTER 126.1 269.2	GCO 121.725	UNICOM 122.8 (CTAF) 0
--------------------------	------------------------------------------	-----------------------	---------------------------------

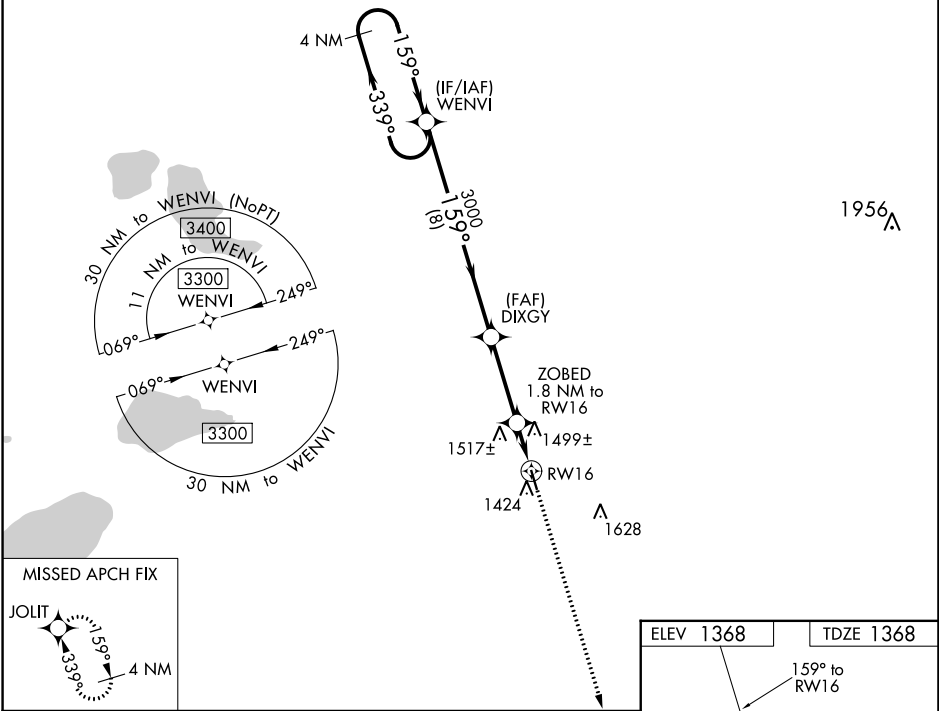

4 NM Holding Pattern WENVI		3300	JOLIT	*LNAV only	
GP 3.00° TCH 42		3300	3000	1.8 NM to RW16	1.1 NM to RW16
8 NM		3.2 NM	0.7	1.1 NM	
CATEGORY	A	B	C	D	
LPV DA	1631-1	263 (300-1)		NA	
LNAV/VNAV DA	1767-1 3/8	399 (400-1 3/8)		NA	
LNAV MDA	1760-1	392 (400-1)	1760-1 3/8 392 (400-1 3/8)	NA	
CIRCLING	1780-1 412 (500-1)	1820-1 452 (500-1)	1940-1 1/2 572 (600-1 1/2)	NA	

