ILS or LOC RWY 35

GARDEN CITY RGNL (GCK)

LOC I-GCK	APP CRS	Rwy Idg	7299
109.9	351°	TDZE	2885
		Apt Elev	2891

ADF required.

For inop ALS, increase TELIC fix minimums S-LOC 35 Cat C/D visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 4000 then climbing right turn to 4800 direct PIEVE LOM/GCK 5.4 DME and hold.

ASOS	KANSAS CITY CENTER	GARDEN CITY TOWER*	GND CON	UNICOM
121.325	125.2 269.4	118.15 (CTAF) L 254.4	119.0 254.4	122.95

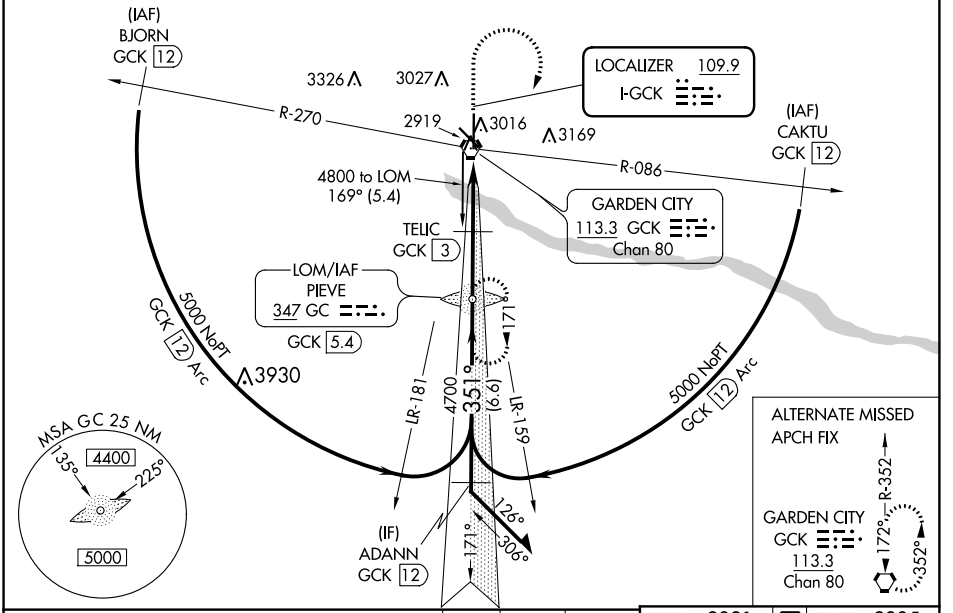

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 41).

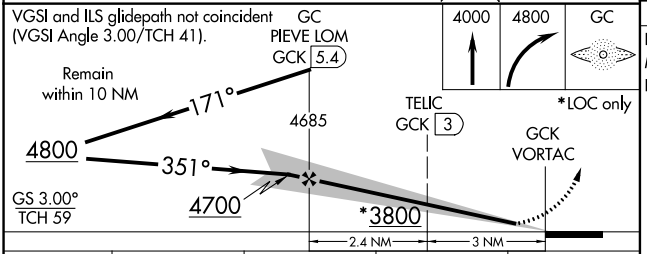

4000	4800	GC
↑	↱	◇

ELEV 2891	D	TDZE 2885

REIL Rwys 12, 17, and 30 L
MIRL Rwy 12-30 L
HIRL Rwy 17-35 L

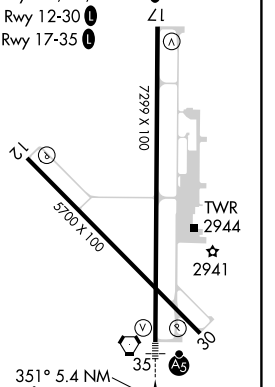

CATEGORY	A	B	C	D
S-ILS 35	3085-½ 200 (200-½)			
S-LOC 35	3800-¾ 915 (1000-¾)		3800-2 915 (1000-2)	
C CIRCLING	3800-1¼ 909 (1000-1¼)		3800-2¾ 909 (1000-2¾)	3800-3 909 (1000-3)
TELIC MINIMUMS (DME REQUIRED)				
S-LOC-35	3180-½ 295 (300-½)			
C CIRCLING	3320-1 429 (500-1)	3360-1 469 (500-1)	3480-1½ 589 (600-1½)	3480-2 589 (600-2)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

NC-2, 03 DEC 2020 to 31 DEC 2020
NC-2, 03 DEC 2020 to 31 DEC 2020