WAAS	APP CRS	Rwy Idg	6501
CH 99619	159°	TDZE	1999
W16A		Apt Elev	1999

RNAV (GPS) RWY 16

HAYS RGNL (HYS)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Russell altimeter setting and increase LPV DA to 2318, LNAV/VNAV DA to 2445, and all MDA 80 feet, increase LNAV/VNAV all Cats visibility ½ mile and LNAV Cat C and D visibility ¼ mile. Baro-VNAV NA when using Russell altimeter setting.

MISSED APPROACH: Climb to 4000 direct GEYJA and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
125.525	124.4 322.4	122.8 (CTAF) L

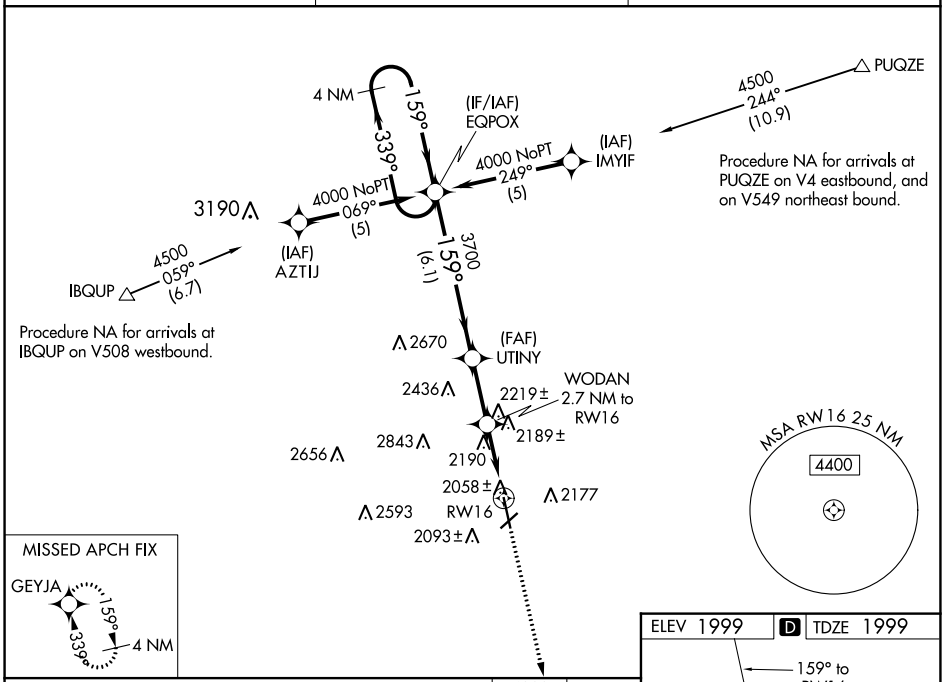

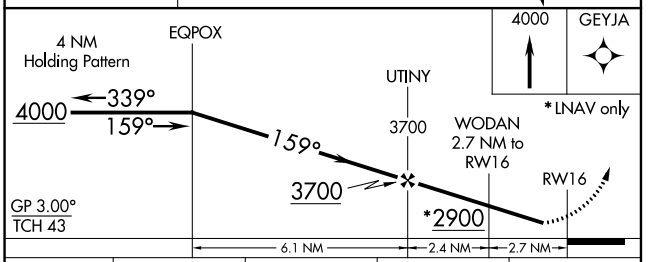

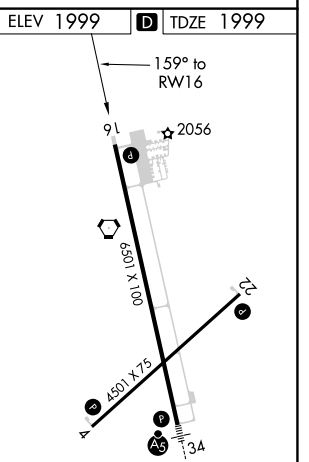

CATEGORY	A	B	C	D
LPV DA	2249-1 250 (300-1)			
LNAV/VNAV DA	2308-1 309 (400-1)			
LNAV MDA	2440-1 441 (500-1)		2440-1¼ 441 (500-1¼)	2440-1½ 441 (500-1½)
CIRCLING	2440-1 441 (500-1)	2480-1 481 (500-1)	2480-1½ 481 (500-1½)	2560-2 561 (600-2)

REIL Rwys 4, 22 and 16 L
MIRL Rwys 4-22 and 16-34 L

NC-2, 03 DEC 2020 to 31 DEC 2020
NC-2, 03 DEC 2020 to 31 DEC 2020