WAAS CH 78208 W35A	APP CRS 354°	Rwy Idg 5001 TDZE 879 Apt Elev 900

RNAV (GPS) RWY 35

TRI-CITY (PPF)

Baro-VNAV NA when using Coffeyville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Coffeyville Muni altimeter setting and increase all DA 54 feet and LNAV/VNAV visibility ¼ mile all Cats; increase all MDA 60 feet.

MISSED APPROACH: Climb to 3000 direct CEBIX and hold.

ASOS	KANSAS CITY CENTER	UNICOM
118.175	132.9 279.5	123.0 (CTAF) L

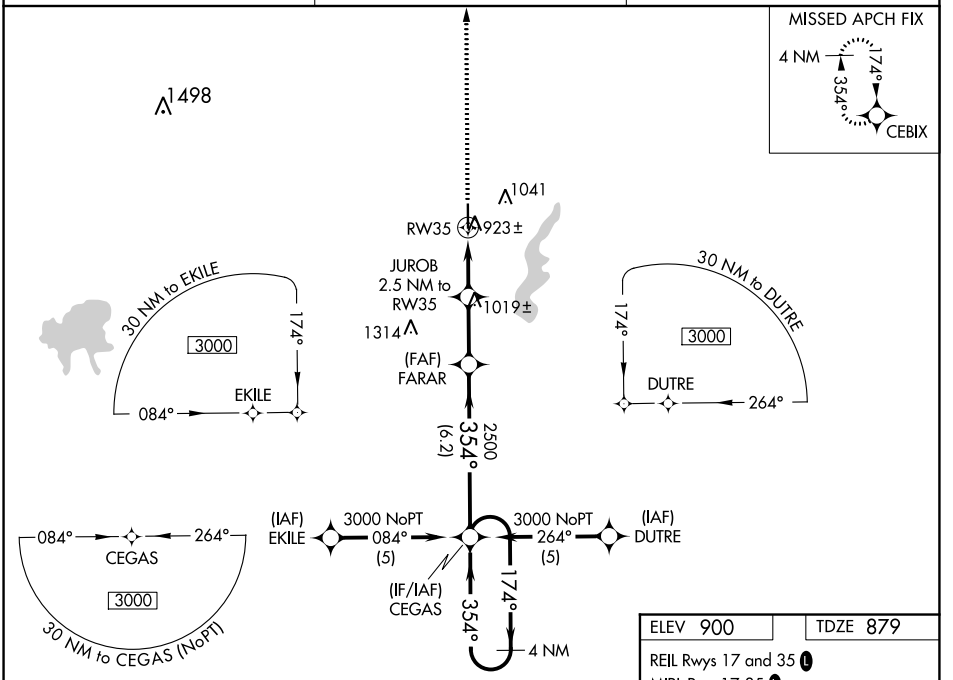

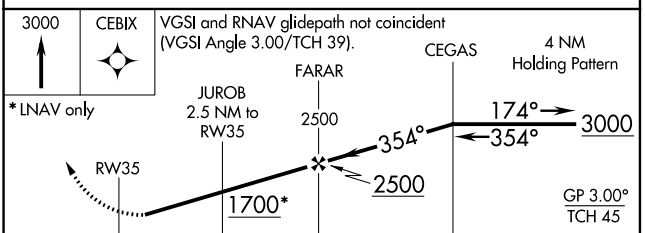

CATEGORY	A	B	C	D
LPV DA	1129-1 250 (300-1)			NA
LNAV/VNAV DA	1173-1 294 (300-1)			NA
LNAV MDA	1300-1 421 (400-1)		1300-1¼ 421 (400-1¼)	NA
CIRCLING	1340-1 440 (500-1)	1360-1 460 (500-1)	1360-1½ 460 (500-1½)	NA

ELEV 900 TDZE 879

REIL Rwys 17 and 35 L

MIRL Rwy 17-35 L

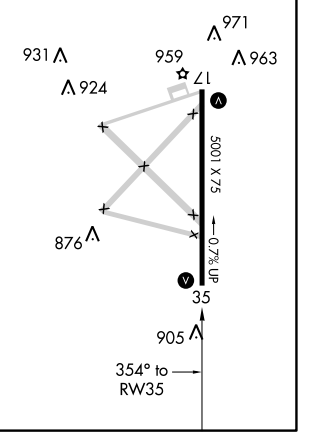

NC-2, 03 DEC 2020 to 31 DEC 2020
NC-2, 03 DEC 2020 to 31 DEC 2020