


APP CRS	Rwy ldg	7352
064°	TDZE	551
	Apt Elev	618

RNAV (GPS) RWY 6

ST LOUIS LAMBERT INTL (STL)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 3000 direct VELVT and hold, continue climb-in-hold to 3000.
▼ WAAS VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV Cat E visibility to 1½ SM and LNAV Cats C/D/E visibility to 1¾ SM.		

D-ATIS	ST. LOUIS APP CON	ST. LOUIS TOWER	GND CON	CLNC DEL	CPDLC
125.025	132.125 360.6	132.475 239.275	121.9 348.6 (Inbound)		
379.925			121.65 377.175 (Outbound)	119.5 363.1	
			118.925 227.125 (Rwy 11/29)		

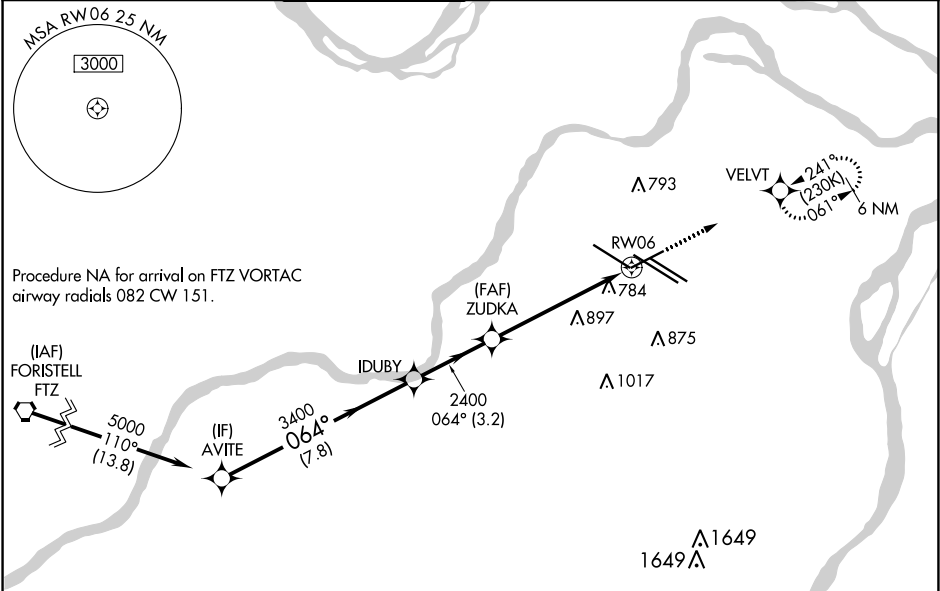

ELEV 618	TDZE 551
----------	----------

