




WAAS CH 99621 W30B	APP CRS 303°	Rwy Idg 10818 TDZE 583 Apt Elev 618
--	------------------------	--

RNAV (GPS) Y RWY 30L
ST LOUIS LAMBERT INTL (STL)

RNP APCH.			 LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized with Rwy 29. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1% SM. # RVR 1800 authorized with use of FD or AP or HUD to DA.		MALSR 	MISSED APPROACH: Climb to 3000 direct TUDNE and hold, continue climb-in-hold to 3000.
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 118.5 257.7	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1	CPDLC

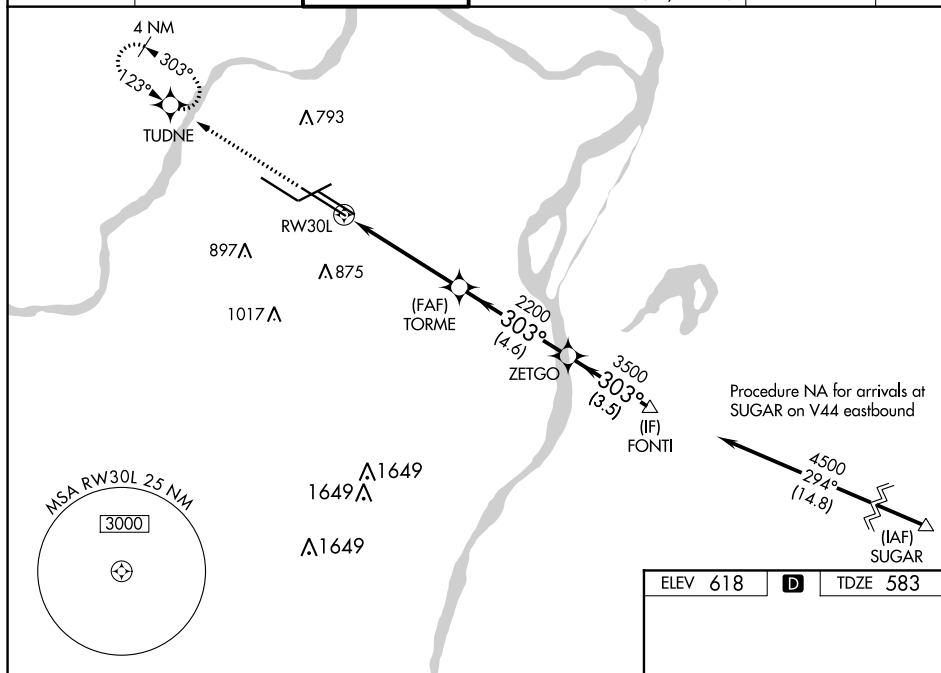

CATEGORY	A	B	C	D
LPV DA#	783/24 200 (200-½)			
LNAV/VNAV DA	974/35 391 (400-⅝)			
LNAV MDA	1100/24 517 (500-½)		1100/55 517 (500-1)	

