RNAV (GPS) RWY 18

DUBUQUE RGNL (DBQ)

WAAS CH 56431 W18A	APP CRS 177°	Rwy Idg 6327 TDZE 1073 Apt Elev 1077

RNP APCH.

T A -34°C/-29°F

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C. When local altimeter setting not received, use Monticello altimeter setting and increase all DA 88 feet and all MDA 100 feet, increase LPV all Cats visibility to 1⅛ mile, increase LNAV/VNAV all Cats ¼, LNAV Cat C and D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Monticello altimeter setting.

MISSED APPROACH: Climb to 2700 direct DIVGE and hold.

ATIS	CHICAGO CENTER	DUBUQUE TOWER ★	GND CON	UNICOM
127.25	133.95 281.4	119.5 (CTAF) L 254.4	121.8	122.95

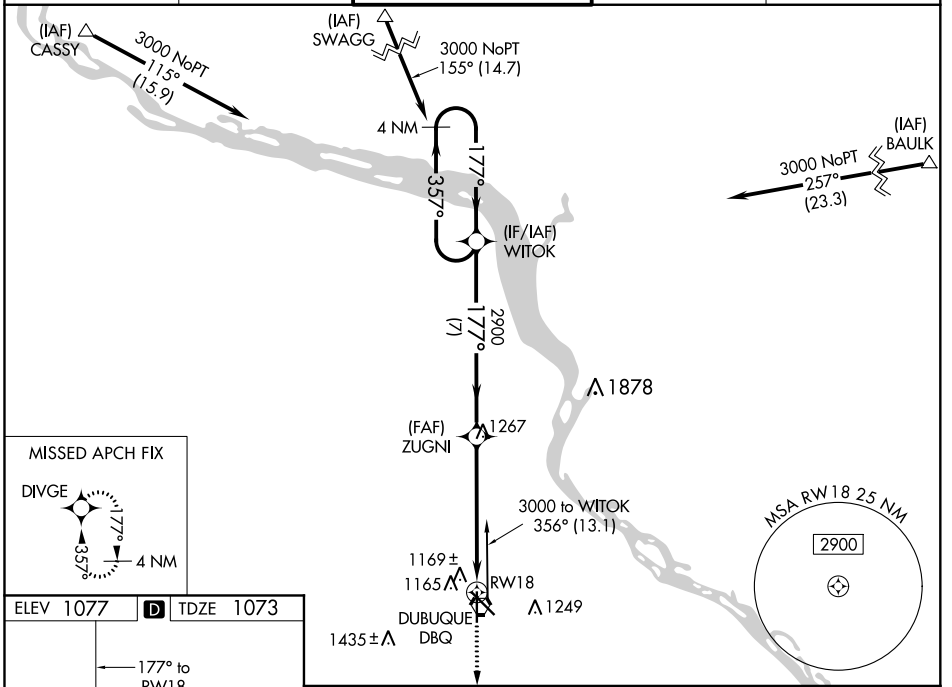

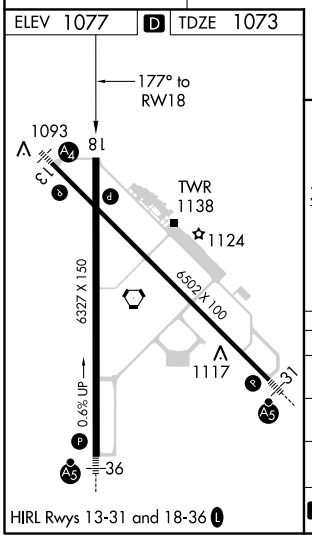

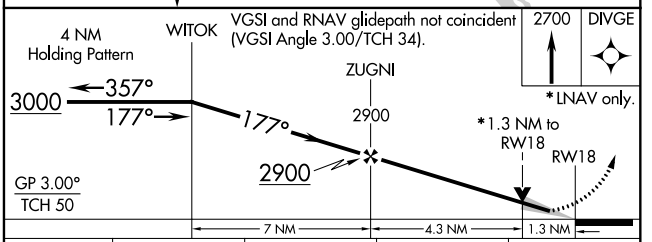

CATEGORY	A	B	C	D
LPV DA	1323-¾ 250 (300-¾)			
LNAV/VNAV DA	1332-⅞ 259 (300-⅞)			
LNAV MDA	1520-1 447 (500-1)		1520-1⅜ 447 (500-1⅜)	
C CIRCLING	1580-1 503 (600-1)		1600-1½ 523 (600-1½)	1800-2¼ 723 (800-2¼)

NC-3, 03 DEC 2020 to 31 DEC 2020
NC-3, 03 DEC 2020 to 31 DEC 2020