

WAAS

CH **90416**

**W36A**

APP CRS

**004°**

Rwy Idg

**4000**

TDZE

**752**

Apt Elev

**754**

**RNAV (GPS) RWY 36**

WASHINGTON MUNI (AWG)

RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Iowa City altimeter setting. When local altimeter setting not received, use Iowa City altimeter setting: increase LPV DA to 1064 feet and LNAV/VNAV DA to 1072 feet; increase all MDAs 80 feet and visibility LNAV and Circling Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct GANAD and hold.

AWOS-3


**127.825**

CHICAGO CENTER

**135.6 370.95**

UNICOM

**122.7 (CTAF) 0**

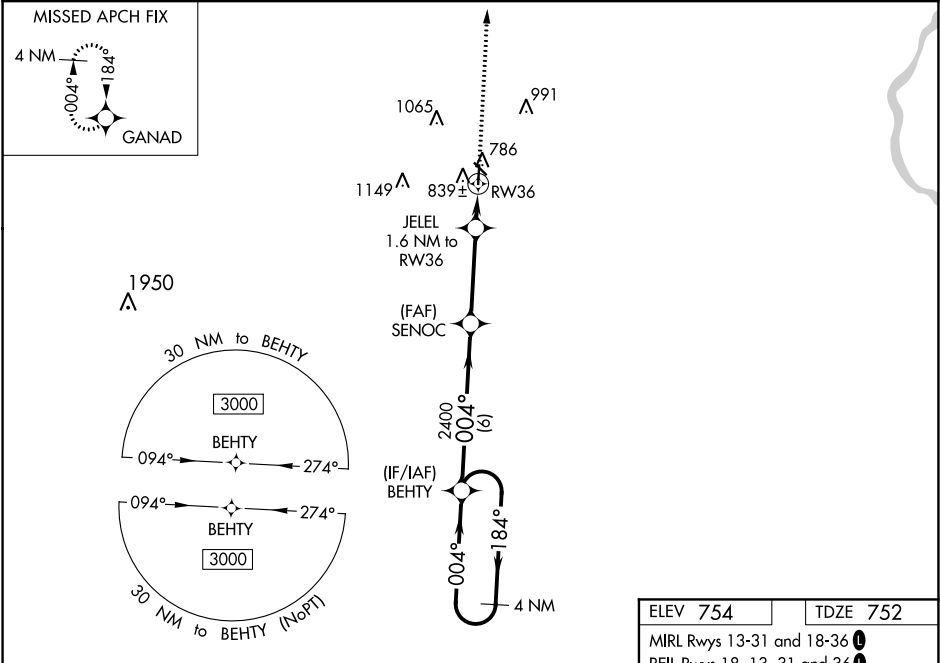

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 24).

3000

GANAD

GP 3.00°

TCH 45

6 NM

3.4 NM

0.6

1 NM

JELE 1.6 NM to RW36

\*1 NM to RW36

\*LNAV only

\*1300

CATEGORY	A	B	C	D
LPV DA	1002-1	250 (300-1)		NA
LNAV/VNAV DA	1010-1	258 (300-1)		NA
LNAV MDA	1100-1	348 (400-1)		NA
CIRCLING	1200-1 446 (500-1)	1260-1 506 (600-1)	1500-2¼ 746 (800-2¼)	NA

ELEV 754

TDZE 752

MIRL Rwy 13-31 and 18-36 0

REIL Rwy 18, 13, 31 and 36 0