


WAAS CH <b>70311</b> <b>W05A</b>	APP CRS <b>055°</b>	Rwy Idg TDZE <b>708</b> Apt Elev <b>727</b>
--	------------------------	---

**RNAV (GPS) Y RWY 5**  
BUFFALO NIAGARA INTL (BUF)

RNP APCH: For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.		MALS R	MISSED APPROACH: Climb to 3000 direct TRAVA and hold.		
D-ATIS <b>135.35</b>	BUFFALO APP CON <b>126.15 263.125</b>	BUFFALO TOWER <b>120.5 257.8</b>	GND CON <b>133.2 257.8</b>	CLNC DEL <b>124.7 257.8</b>	CPDLC

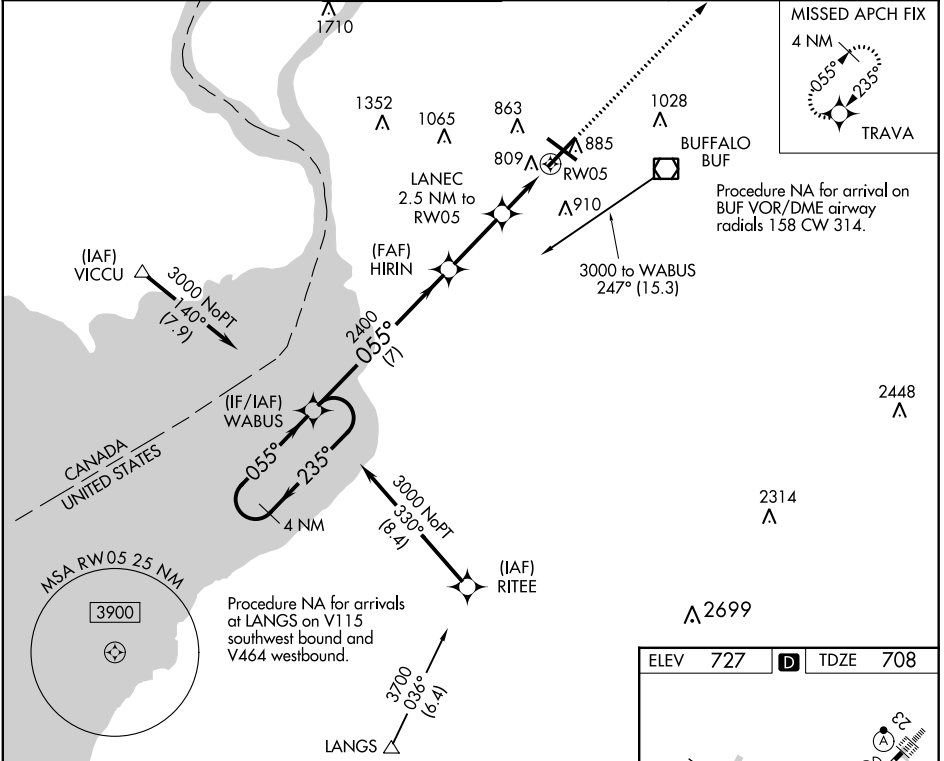

4 NM Holding Pattern		WABUS		HIRIN		LANEC 2.5 NM to RW05		3000 ↑ TRAVA ✦	
3000 ← 235° 055° →		055°		2400		*1.1 NM to RW05		*LNAV only	
GP 3.00° TCH 46		2400		*1520		RW05			
		7 NM		2.8 NM		1.4 NM		1.1 NM	
CATEGORY	A	B	C	D					
LPV DA	908/18		200 (200-½)						
LNAV/VNAV DA	997/24		289 (300-½)						
LNAV MDA	1060/24	352 (400-½)	1060/35	352 (400-¾)					
CIRCLING	1200-1	473 (500-1)	1220-1½ 493 (500-½)	1340-2 613 (700-2)					

