VORTAC SAX	APP CRS	Rwy Idg	N/A
115.7	345°	TDZE	N/A
Chan 104		Apt Elev	422

VOR-A

SUSSEX (FWN)

When local altimeter setting not received, use Teterboro altimeter setting and increase all MDA 140 feet and ANKLE FIX Minimums Cats A & B visibility ¼ mile and Cat C ½ mile. Procedure NA at night. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climbing right turn to 3000 direct SAX VORTAC and hold.

ASOS	NEW YORK APP CON	UNICOM
118.525	127.6 379.9	122.7 (CTAF)

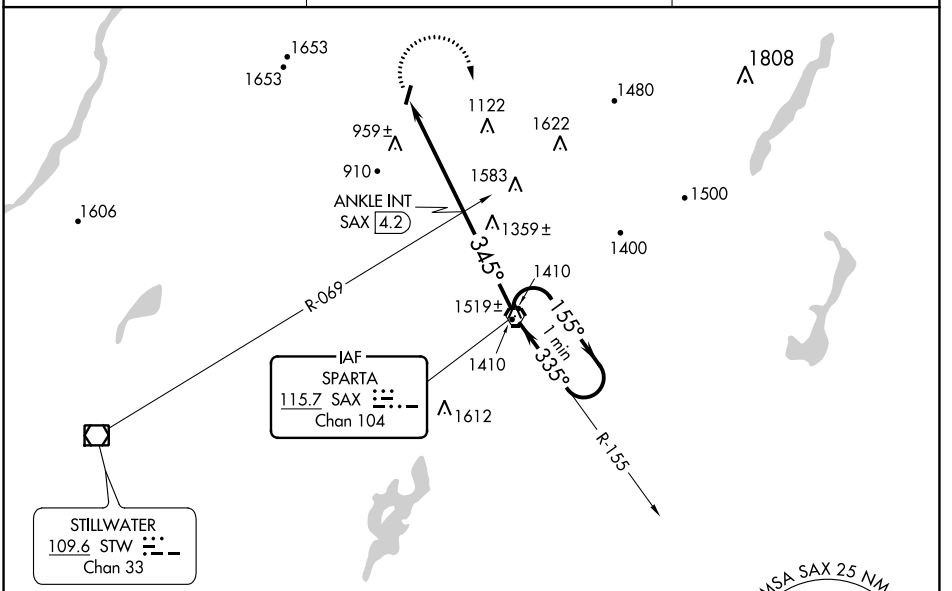

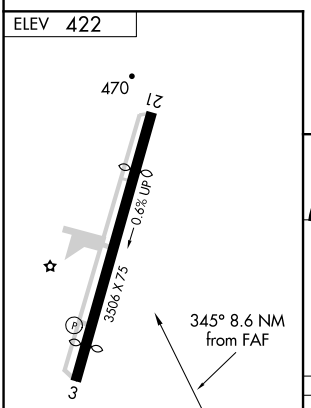

MIRL Rwy 3-21 (L)
REIL Rwy 3 and 21 (L)

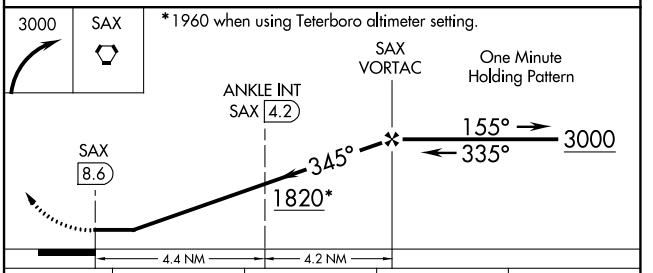

CATEGORY	A	B	C	D
C CIRCLING	1820-1¼ 1398 (1400-1¼)	1820-1½ 1398 (1400-1½)	1820-3 1398 (1400-3)	NA

ANKLE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)

C CIRCLING	1300-1 878 (900-1)	1300-1¼ 878 (900-1¼)	1300-2½ 878 (900-2½)	NA

FAF to MAP 8.6 NM

Knots	60	90	120	150	180
Min:Sec	8:36	5:44	4:18	3:26	2:52

NE-2, 03 DEC 2020 to 31 DEC 2020
NE-2, 03 DEC 2020 to 31 DEC 2020