RNAV (GPS) RWY 10

GENESEE COUNTY (GVQ)

WAAS CH 82421 W10A	APP CRS 102°	Rwy Idg 5499 TDZE 914 Apt Elev 914

NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 38°C (100°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rochester altimeter setting and increase LPV DA all Cats to 1214, LNAV/VNAV DA all Cats to 1268, and all MDA 120 feet; increase LPV all Cats and Circling Cat D visibility ¼ mile, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅜ mile. Baro-VNAV and VDP NA when using Rochester altimeter setting.

MISSED APPROACH: Climb to 3000 direct POCZI and hold.

AWOS-3PT	ROCHESTER APP CON	CLNC DEL	UNICOM
127.525	123.7 322.3	121.8	122.7 (CTAF)

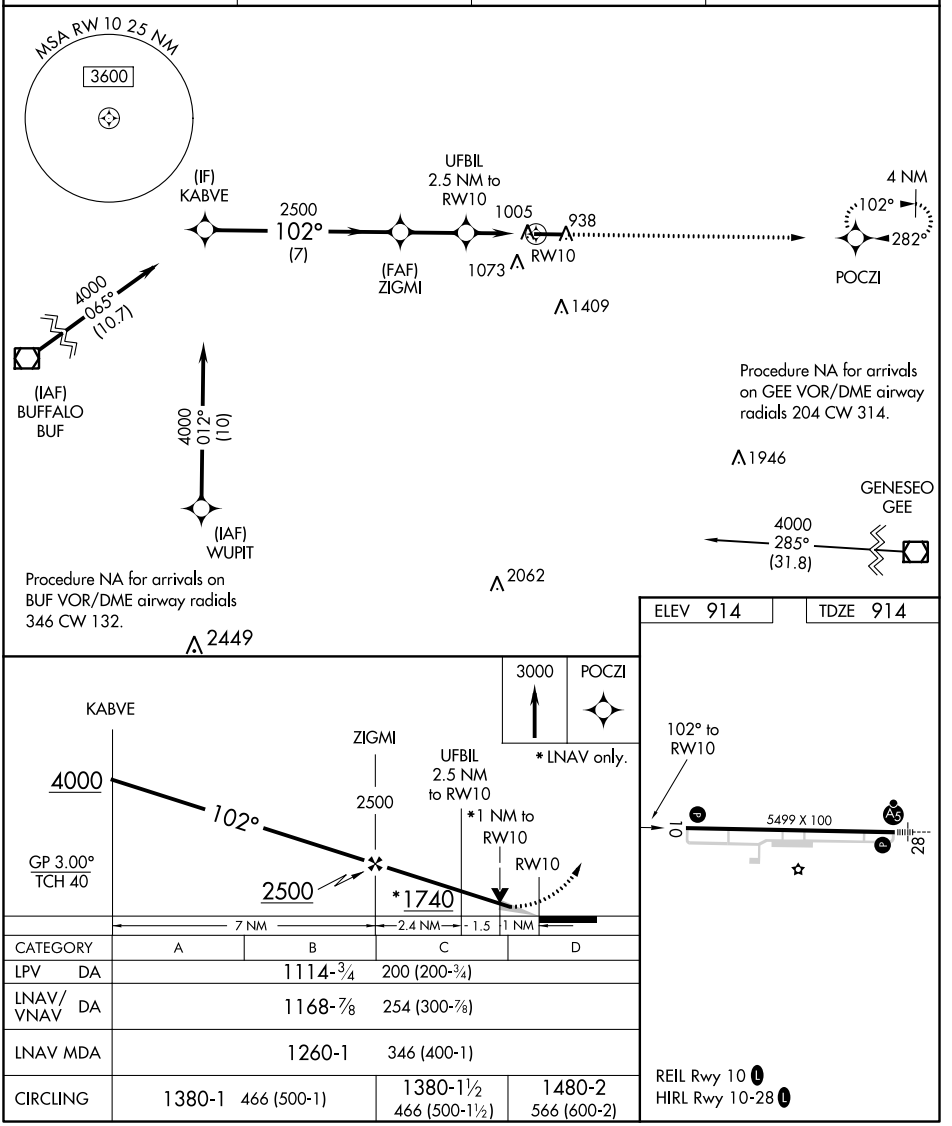

CATEGORY	A	B	C	D
LPV DA	1114-¾		200 (200-¾)	
LNAV/VNAV DA	1168-⅞		254 (300-⅞)	
LNAV MDA	1260-1		346 (400-1)	
CIRCLING	1380-1	466 (500-1)	1380-1½ 466 (500-1½)	1480-2 566 (600-2)

NE-2, 03 DEC 2020 to 31 DEC 2020
NE-2, 03 DEC 2020 to 31 DEC 2020