

LOC I-HWV	APP CRS	Rwy Idg	4201
108.95	059°	TDZE	76
		Apt Elev	81

ILS or LOC RWY 6

BROOKHAVEN (HWV)

⚠


NA

Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Long Island Mac Arthur altimeter setting and increase all DA 28 feet and all MDA 40 feet. For inoperative MALSR, increase S-ILS 6 all Cats visibility to ¾, and S-LOC 6 all Cats visibility to 1 mile. ILS localizer unusable 0.4 NM to threshold.

MALSR

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 on heading 270° and CCC VOR/DME R-227 to MAIDS OM/INT and hold, continue climb-in-hold to 2000.

ASOS 119.625	NEW YORK APP CON 120.05 343.75	CLNC DEL 133.2	UNICOM 122.8 (CTAF) 0
-----------------	-----------------------------------	-------------------	--------------------------

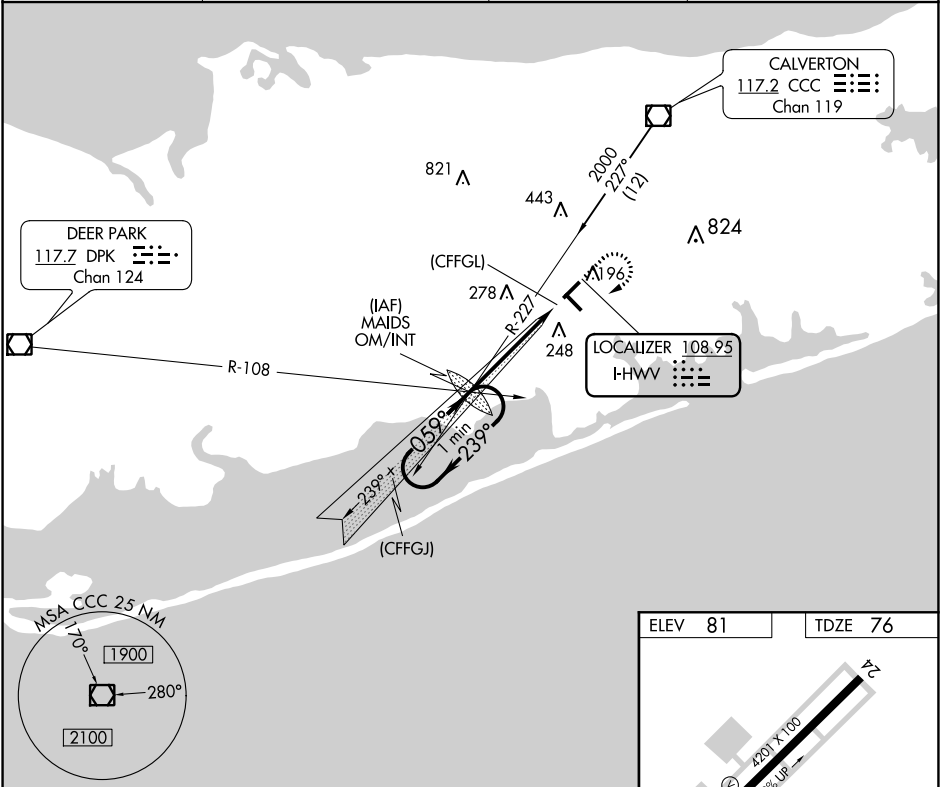

One Minute Holding Pattern

MAIDS OM/INT

1680

600

2000

hdg 270°

CCC R-227

MAIDS OM/INT

2000

239°

059°

1700

GS 3.00°

TCH 48

(CFFGL)

4.4 NM

0.4

CATEGORY	A	B	C	D
S-ILS 6	337-¾	261 (300-¾)	NA	
S-LOC 6	520-¾	444 (500-¾)	NA	
CIRCLING	560-1	479 (500-1)	NA	

ELEV 81

TDZE 76

REIL Rwys 15, 24 and 33

MIRL Rwys 6-24 and 15-33

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28