RNAV (GPS) RWY 10

WILLIAMSON-SODUS (SDC)

WAAS	APP CRS		
CH **90507**	**100°**	Rwy Idg	**3803**
W10A		TDZE	**424**
		Apt Elev	**424**

DME/DME RNP-0.3 NA. When VGSI inop, Straight-in and Circling Rwy 10 procedures NA at night. When VGSI inop, Circling Rwy 28 NA at night. Visibility reduction by helicopters NA. When local altimeter setting not received, use Rochester altimeter setting and increase all DA 77 feet and all MDA 80 feet, LPV all Cats visibility ¼ mile, and Circling Cat C visibility ½ mile.

MISSED APPROACH: Climb to 3100 direct WALCO and hold.

AWOS-3	ROCHESTER APP CON	UNICOM
124.2	**119.55 269.6**	**122.8** (CTAF) L

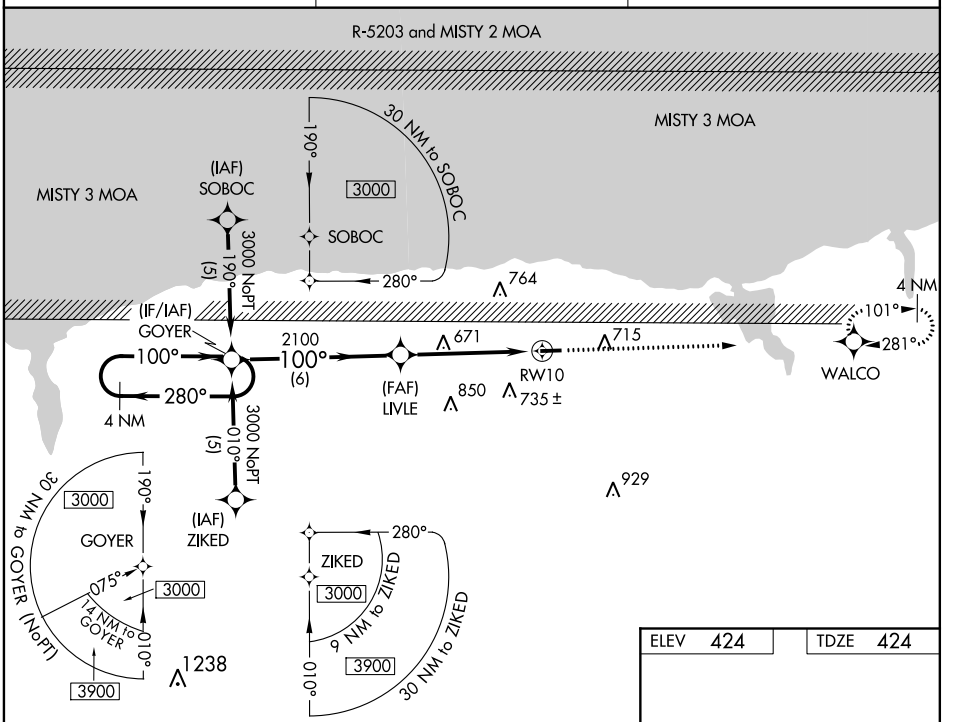

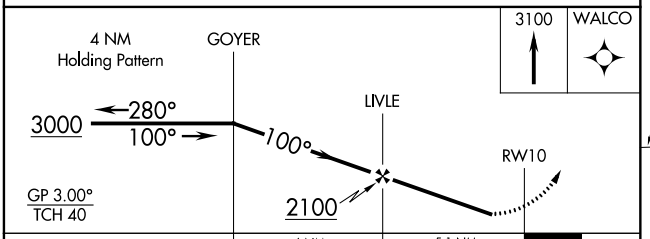

CATEGORY	A	B	C	D
LPV DA	760-1¼	336 (400-1¼)		NA
LNAV MDA	940-1	516 (600-1)	940-1½ 516 (600-1½)	NA
CIRCLING	1000-1	576 (600-1)	1020-1½ 596 (600-1½)	NA

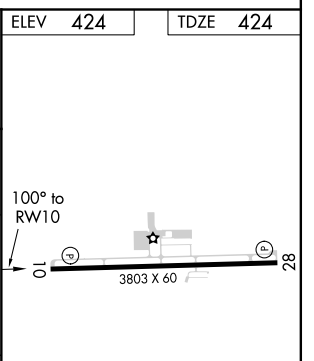

MIRL Rwy 10-28 L
REIL Rwys 10 and 28 L

NE-2, 03 DEC 2020 to 31 DEC 2020
NE-2, 03 DEC 2020 to 31 DEC 2020