


DOVER APP CON
132.425 257.875
DOVER CLNC DEL
125.55
ASOS
118.375
UNICOM
123.0

TOP ALTITUDE:
2000

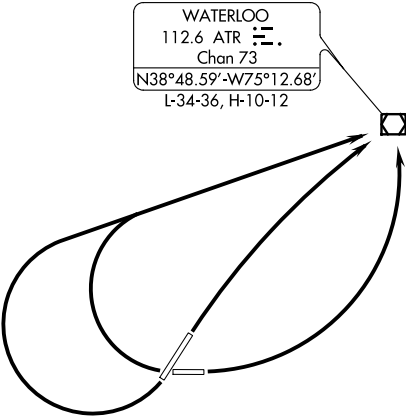

TAKEOFF MINIMUMS:

Rwys 4, 10, 28: Standard.
Rwy 22: 200-1¼ or standard with a minimum climb of 201' per NM to 300, or alternatively with standard takeoff minimums and a normal 200' per NM climb gradient, takeoff must occur no later than 1100' prior to DER.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION
<u>TAKEOFF RUNWAY 4:</u> Turn right direct ATR VOR/DME, thence . . .
<u>TAKEOFF RUNWAY 10:</u> Turn left direct ATR VOR/DME, thence . . .
<u>TAKEOFF RUNWAY 22:</u> Turn right direct ATR VOR/DME, thence . . .
<u>TAKEOFF RUNWAY 28:</u> Turn right direct ATR VOR/DME, thence . . .
. . . maintain 2000. Expect clearance to filed altitude three (3) minutes after departure.