WAAS CH 65621 W04A	APP CRS 045°	Rwy ldg 5130 TDZE 51 Apt Elev 53

RNAV (GPS) RWY 4

DELAWARE COASTAL (GED)

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting and increase LPV DA to 353 feet, LNAV/VNAV DA to 555 feet, increase all MDA 60 feet. Increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats C/D visibility to 1¼ mile and increase Circling Cat C visibility to 2 miles and Cat D visibility to 2¼ miles. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C (9°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Salisbury altimeter setting. For inoperative MALS increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ¼ mile. For inoperative MALS when using Salisbury altimeter increase LPV visibility all Cats, LNAV/VNAV and LNAV Cat D ¼ mile. Night Landing: Rwy 10, 28 NA.

MALSR

MISSED APPROACH: Climb to 2000 direct HUVOX and hold.

ASOS	DOVER APP CON	UNICOM
118.375	132.425 257.875	123.0 (CTAF) L

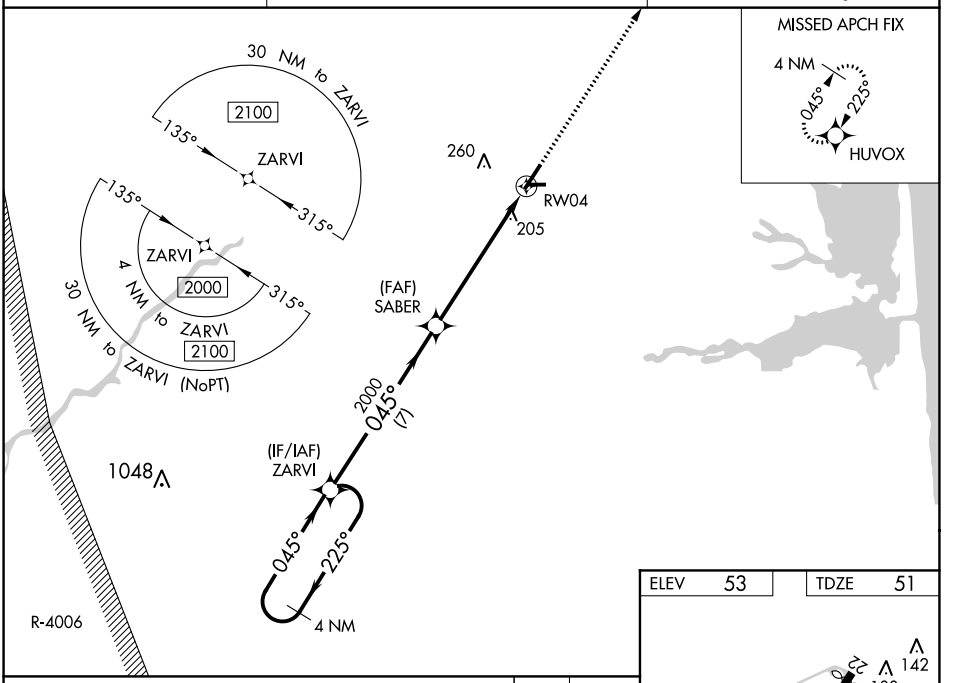

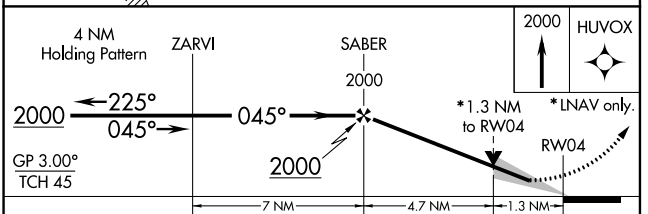

CATEGORY	A	B	C	D
LPV DA	301-¾ 250 (300-¾)			
LNAV/VNAV DA	503-1¼ 452 (500-1¼)			
LNAV MDA	520-¾ 469 (500-¾)		520-1⅛ 469 (500-1⅛)	
C CIRCLING	560-1 507 (600-1)	580-1 527 (600-1)	720-1¾ 667 (700-1¾)	720-2 667 (700-2)

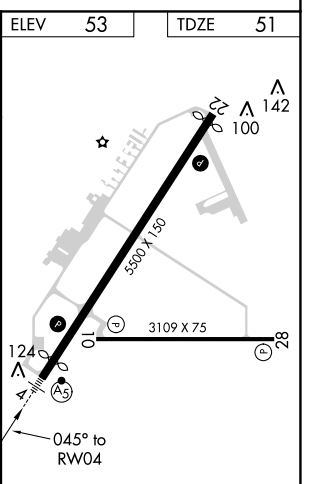

NE-3, 03 DEC 2020 to 31 DEC 2020
NE-3, 03 DEC 2020 to 31 DEC 2020