

WAAS CH 70705 W05A	APP CRS 051°	Rwy Idg TDZE 193 Apt Elev 193	5002
--	------------------------	---	-------------

RNAV (GPS) RWY 5


DINWIDDIE COUNTY (PTB)

⚠ Inop table does not apply to LPV all Cats, LNAV/VNAV all Cats and LNAV Cat A and B. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Richmond Executive-Chesterfield County altimeter setting. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Richmond Executive-Chesterfield County altimeter setting: increase LPV DA to 534 feet and LNAV/VNAV DA to 546 feet and all MDA 40 feet; increase LNAV Cat C visibility ½ mile and increase Circling Cat C visibility ¼ mile. For inop ODALS when using Richmond Executive-Chesterfield County altimeter setting, increase LPV all Cats visibility and LNAV/VNAV all Cats visibility to 1½ mile. Inop table does not apply to LNAV Cat A and B when using Richmond Executive-Chesterfield County altimeter setting. For inop ODALS, increase LNAV Cat C visibility to 1½ mile.

ODALS

MISSED APPROACH:
Climb to 2000 direct
ONIKE and hold.

AWOS-3 133.325	POTOMAC APP CON 126.75 307.2	GCO 135.075	UNICOM 122.7 (CTAF) 0
--------------------------	--	-----------------------	---------------------------------

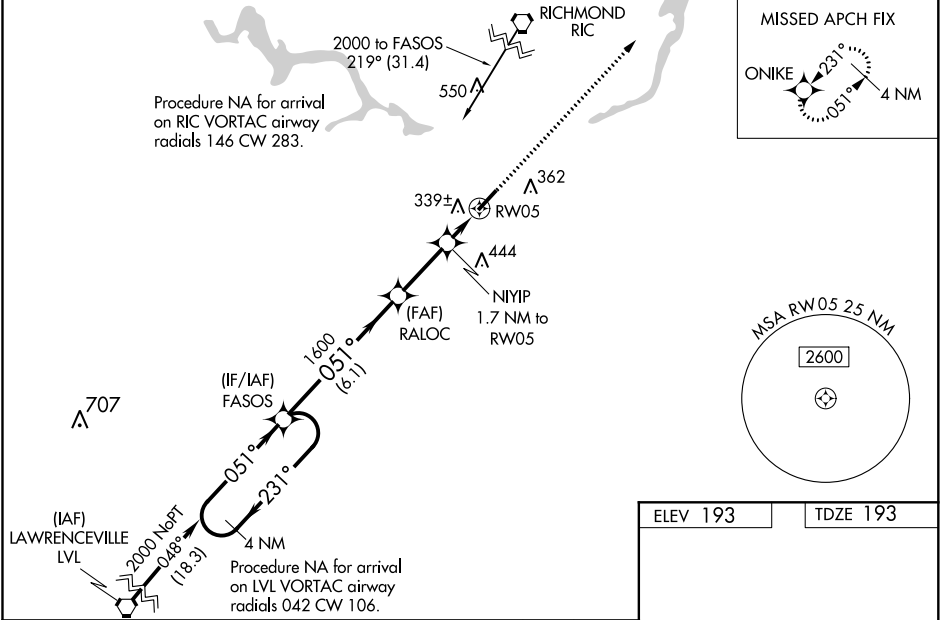

4 NM Holding Pattern		FASOS	RALOC	NIYIP 1.7 NM to RW05	2000	ONIKE
2000		231°	051°	1600	1600	
GP 3.00 TCH 42						
		6.1 NM	2.6 NM	0.6 NM	1.1 NM	
CATEGORY		A	B	C	D	
LPV DA		497-1	304 (400-1)		NA	
LNAV/VNAV DA		509-1	316 (400-1)		NA	
LNAV MDA		600-1	407 (500-1)		NA	
CIRCLING		680-1	487 (500-1)	760-1½ 567 (600-1½)	NA	

