

APP CRS	Rwy Idg	3750
254°	TDZE	69
	Apt Elev	70

RNAV (GPS) RWY 25

SUFFOLK EXECUTIVE (SFQ)



▼

▲

DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA.
When local altimeter setting not received, use Norfolk Intl altimeter setting and increase all MDA 60 feet.

MISSED APPROACH: Climb to 2000 direct LALSE and hold.

AWOS-3 119.375	NORFOLK APP CON 127.9 269.425	UNICOM 122.7 (CTAF) 0
-------------------	----------------------------------	--------------------------

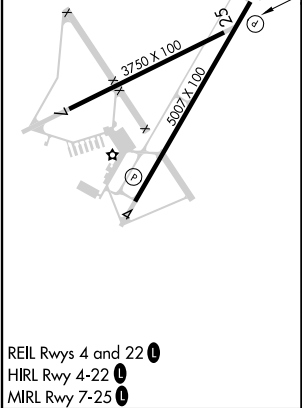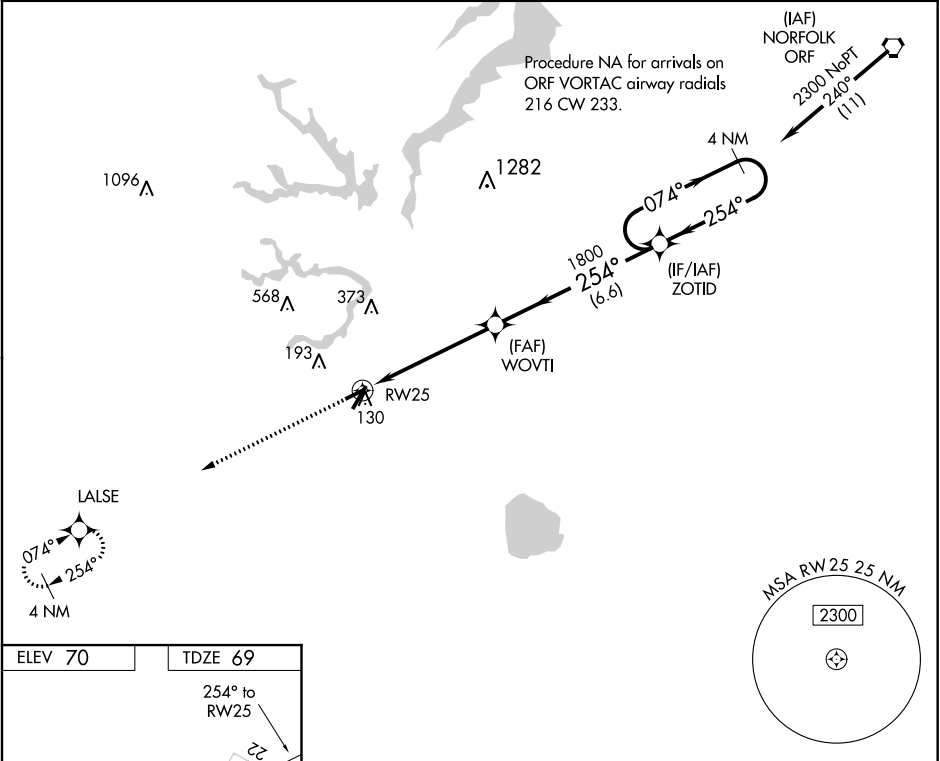

2000	LALSE	Visual Segment - Obstacles.			
		4 NM Holding Pattern			
		ZOTID			
		WOVTI			
		RW25			
		1800			
		5.3 NM 6.6 NM			
CATEGORY	A	B	C	D	
LNAV MDA	480-1	411 (500-1)	NA		
CIRCLING	500-1 430 (500-1)	560-1 490 (500-1)	NA		