

APP CRS	Rwy Idg	9500
087°	TDZE	13
	Apt Elev	36

RNAV (RNP) Z RWY 9L

PHILADELPHIA INTL (PHL)


▼

For uncompensated Baro-VNAV systems, procedure NA below -12°C (10°F) or above 54°C (130°F). GPS required.  
For inop ALS, increase RNP 0.11 visibility all Cats to RVR 6000 and RNP 0.30 visibility all Cats to 1½ SM.

MALSR

MISSED APPROACH: Climb to 3000 on track 087° to CUBUT and on track 173° to FIDAX and on track 259° to OOD VORTAC and hold.

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER	GND CON	CLNC DEL
ARR 133.4	124.35 319.15	118.5 327.05 (Rwys 9L/27R, 8/26 and 17/35)	121.9 348.6	118.85 348.6
DEP 135.925		135.1 327.05 (Rwy 9R/27L)		

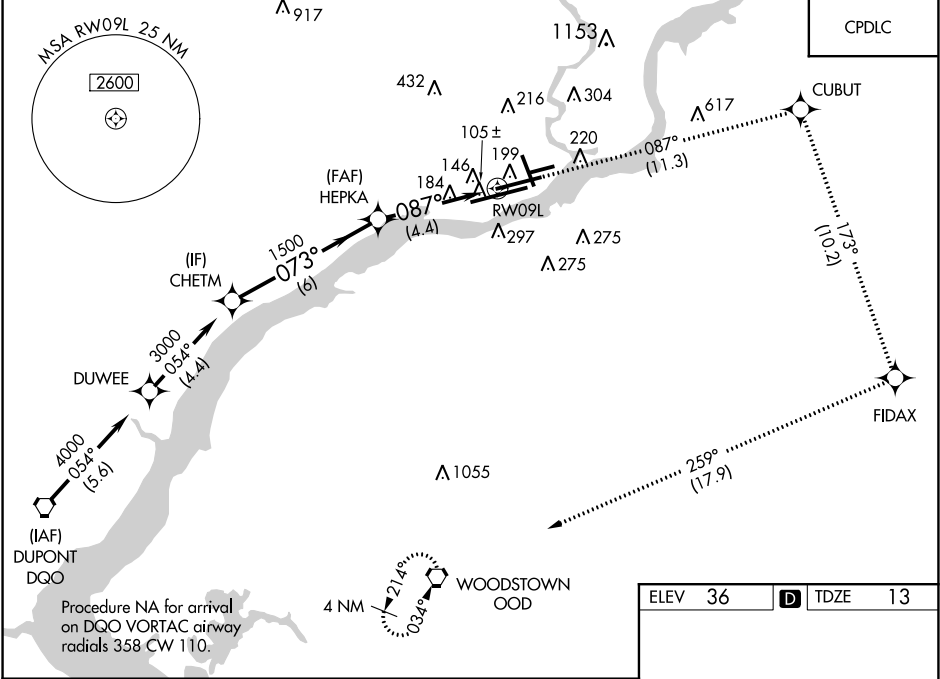

	CHETM	3000	↑	3000	tr 087°	CUBUT	tr 173°	FIDAX	tr 259°	OOD
		3000	073°	HEPKA	1500	087°	RW09L			
				6 NM		4.4 NM				
CATEGORY	A	B	C	D						
RNP 0.11 DA		382/35	369 (400-%)							
RNP 0.30 DA		434/45	421 (400-%)							
AUTHORIZATION REQUIRED										

ELEV 36

TDZE 13

TDZ/CL Rwy 9R  
HIRL all Rwys  
REIL Rwys 9L and 35