RNAV (RNP) Z RWY 23

YEAGER (CRW)

APP CRS	Rwy Idg	6215
233°	TDZE	931
	Apt Elev	947

RNP AR APCH.

For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1⅝ SM.

ALSF-1

MISSED APPROACH: Climb to 4000 on track 233° to CITMA and hold.

ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON	CLNC DEL
127.6	124.1 269.125	125.7 257.8	121.8 348.6	118.55

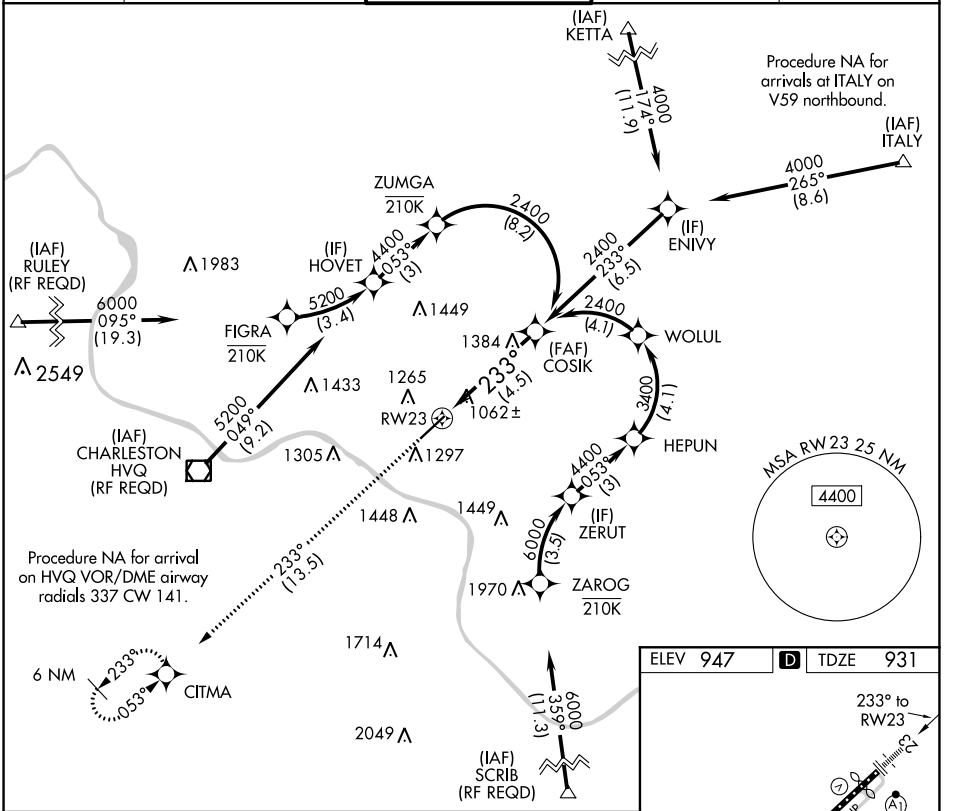

4000 tr 233°	CITMA	See planview for mutiple IF locations.

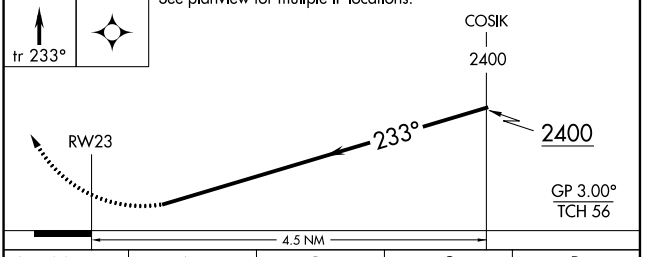

CATEGORY	A	B	C	D
RNP 0.30 DA	1419/60	488 (500-1¼)		

AUTHORIZATION REQUIRED

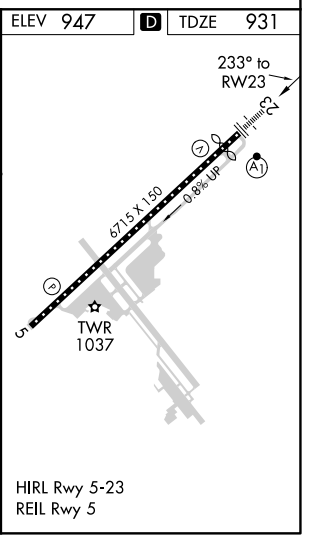

HIRL Rwy 5-23
REIL Rwy 5

NE-4, 03 DEC 2020 to 31 DEC 2020
NE-4, 03 DEC 2020 to 31 DEC 2020