


WAAS CH 87115 W05A	APP CRS 053°	Rwy Idg TDZE Apt Elev	6215 947 947
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 5

YEAGER(CRW)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct ENIVY and hold.
<div><div>T</div><div>A</div></div>	For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.	

ATIS 127.6	CHARLESTON APP CON 124.1 269.125	CHARLESTON TOWER 125.7 257.8	GND CON 121.8 348.6	CLNC DEL 118.55
----------------------	--	--	-------------------------------	---------------------------

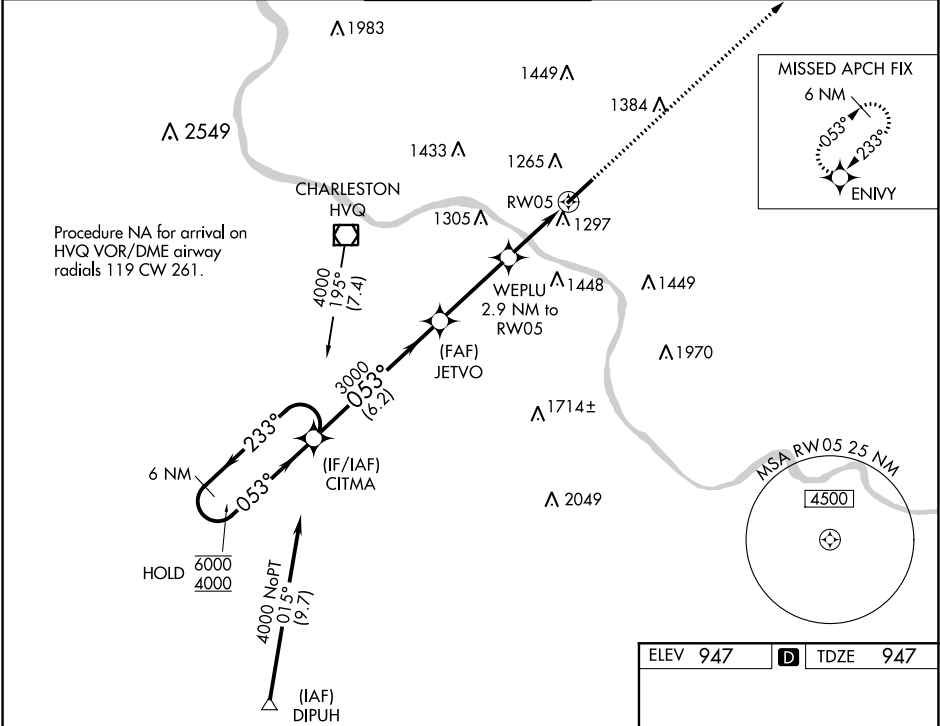

6 NM Holding Pattern CITMA		3000 ENIVY	
6000 ← 233° 4000 → 053°		* LNAV only	
GP 3.00° TCH 56		* 1.7 NM to RW05	
6.2 NM		1.2 NM	
A		D	
CATEGORY	A	B	C
LPV DA	1147/40	200 (200-¾)	
LNAV/VNAV DA	1584-1¾	637 (700-1¾)	
LNAV MDA	1560/55 613 (700-1)	1560-1¾ 613 (700-1¾)	
CIRCLING	1600-1 653 (700-1)	1760-2½ 813 (900-2½)	1880-3 933 (1000-3)

